


K-DV STECK B SCHLITZ

Bidirectional flow control valves, air restriction at both ends (»B«), plug-in connector

HANSA FLEX

属性

| | |
|----------------|------------------------------------|
| 工作压力 | 最大 10 巴 |
| 温度范围 | 0 °C to +70 °C |
| 空心螺钉, 摆臂, 调节螺钉 | Nickel-plated brass |
| 内部部件 | Brass with a bare metal surface |
| O 形圈凸缘密封件 | NBR |
| 密封(防丢失) | Polyamide (glass fibre-reinforced) |

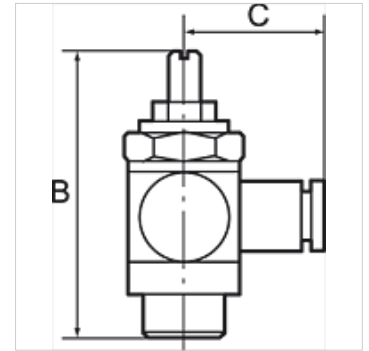

提示

其它数据应客户要求提供。

描述

For regulation of a cylinder piston speed at both ends and control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece for mounting directly. Compact type of construction, also ideal where space is restricted.

货品

| 名称 | C (mm) | 用于软管 | 螺纹 | SW | B (mm) |
|----------------|-----------|-------|-------|-------|-----------|
| K- 07 15 05 01 | 18,6 | 4 mm | M 5 | 8 mm | 24,5 |
| K- 07 15 05 02 | 21,7 | 6 mm | M 5 | 8 mm | 24,5 |
| K- 07 15 05 06 | 20,6 | 4 mm | G 1/8 | 14 mm | 32,0 |
| K- 07 15 05 07 | 22,7 | 6 mm | G 1/8 | 14 mm | 32,0 |
| K- 07 15 05 08 | 23,7 | 8 mm | G 1/8 | 14 mm | 32,0 |
| K- 07 15 05 04 | 24,2 | 6 mm | G 1/4 | 17 mm | 40,0 |
| K- 07 15 05 05 | 24,7 | 8 mm | G 1/4 | 17 mm | 40,0 |
| K- 07 15 05 03 | 26,8 | 10 mm | G 1/4 | 17 mm | 40,0 |
| K- 07 15 05 09 | 28,8 | 10 mm | G 3/8 | 20 mm | 50,0 |