



K-ABSPV SCHL SCHL

Shut-off valves, pipe - pipe

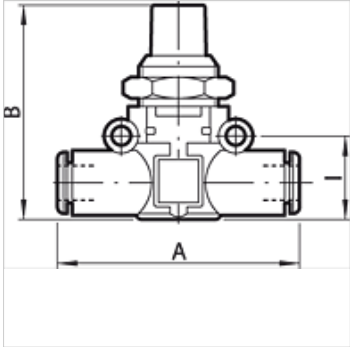

属性	
工作压力	最大 10 巴
流量 6.3 bar,p=1 巴	280 NI/min (Ø 6), 470 NI/min (Ø 8)
温度范围	-20 °C to +60 °C
体	Technopolymer
内部部件	nickel-plated brass, brass, Intechnopolymer, stainless steel
密封材料	NBR
装配	Wall mounting (housing with drilled holes) Bracket mounting (mounting bracket available) Panel mounting (with bracket or lock nut)
标志	on the housing



提示

其它数据应客户要求提供。

描述

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design.
All components can be installed In parallel, In series, In a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

货品

名称	用于软管 Ø (mm)	标志	A (mm)	B (mm)	l (mm)
K- 07 15 04 42	6	On housing	49,0	41,0	14,6
K- 07 15 04 43	8	On housing	57,2	46,0	18,7