


# K-SNV ENTLUE V SCHA SCHL GEW

Quick-exhaust valves, with silencer, pipe (input) - thread (output)

**HANSA FLEX**

## 属性

工作压力	1 - 10 bar
流量 6.3 bar	50 NI/min (Ø 4), 270 NI/min (Ø 6), 400 NI/min (Ø 8)
流量排气 6.3 巴	100 NI/min (Ø 4), 700 NI/min (Ø 6), 1000 NI/min (Ø 8)
温度范围	-20 °C to +60 °C
体	Technopolymer
内部部件	nickel-plated brass, brass, \ntechnopolymer, stainless steel
密封材料	NBR
装配	Wall mounting (housing with drilled holes) Bracket mounting (mounting bracket available) Panel mounting (with bracket or lock nut)
标志	on the housing

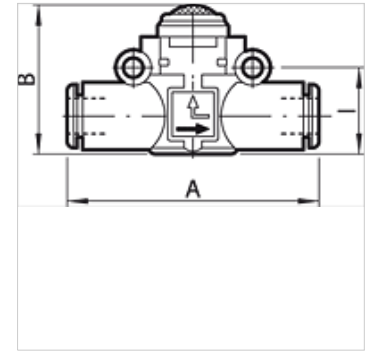

## 提示

其它数据应客户要求提供。

## 描述

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design. <br>All components can be installed In parallel, In series, In a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

## 货品

名称	螺纹	用于软管 Ø (mm)	A (mm)	B (mm)	l (mm)
K- 07 15 25 31	M 5	4	46,7	19,8	12,8
K- 07 15 25 32	G 1/8	4	50,6	19,8	12,8
K- 07 15 20 41	G 1/8	6	58,5	25,5	14,6
K- 07 15 20 42	G 1/8	8	66,2	31,5	18,7
K- 07 15 20 39	G 1/4	6	61,5	25,5	14,6
K- 07 15 20 40	G 1/4	8	70,6	31,5	18,7
K- 07 15 20 43	G 3/8	8	72,2	31,5	18,7