


# K-WKV 3/2 SCHLS SCHNVERSCHR

3/2-way toggle valves, discharge port on thread, quick-lock screw fitting

**HANSA FLEX**

## 属性

|             |   |
|-------------|---|
| 工作压力        | 最大8巴                                    |
| 温度范围        | 0 °C to +70 °C                          |
| 配电板螺纹       | M 12 x 0.75 (sheet thickness max. 4 mm) |
| 内部部件        | Brass with a bare metal surface         |
| 密封材料        | NBR                                     |
| 空心螺钉,摆臂,摇转柄 | Nickel-plated brass                     |
| 密封(防丢失)     | Polyamide (glass fibre-reinforced)      |

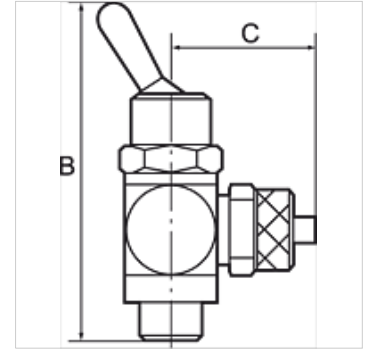

## 提示

其它数据应客户要求提供。

## 描述

Manually operated toggle valves, 2/2 and 3/2-way types. For all applications where compressed air must be switched on or off quickly and easily or a cylinder operated manually. Designed as a banjo-type valve with a hollow bolt and ring piece. Suitable for screwing directly into the equipment or for panel mounting. Compact type of construction, also ideal where space is restricted.

## 货品

| 名称             | 规格      | C<br>(mm) | 用于软管         | 螺纹    | SW    | B<br>(mm) |
|----------------|---------|-----------|--------------|-------|-------|-----------|
| K- 07 15 07 24 | 3/2-way | 16,0      | G 1/8 IG     | G 1/8 | 14 mm | 55,0      |
| K- 07 15 07 25 | 3/2-way | 25,0      | 5 mm / 3 mm  | G 1/8 | 14 mm | 55,0      |
| K- 07 15 07 26 | 3/2-way | 25,0      | 6 mm / 4 mm  | G 1/8 | 14 mm | 55,0      |
| K- 07 15 07 27 | 3/2-way | 25,0      | 8 mm / 6 mm  | G 1/8 | 14 mm | 55,0      |
| K- 07 15 07 20 | 3/2-way | 22,0      | G 1/4 IG     | G 1/4 | 17 mm | 60,0      |
| K- 07 15 07 22 | 3/2-way | 26,5      | 6 mm / 4 mm  | G 1/4 | 17 mm | 60,0      |
| K- 07 15 07 23 | 3/2-way | 27,5      | 8 mm / 6 mm  | G 1/4 | 17 mm | 60,0      |
| K- 07 15 07 21 | 3/2-way | 28,5      | 10 mm / 8 mm | G 1/4 | 17 mm | 60,0      |