
# K-KOLST LOSE ZYL
Rodless cylinders

HANSA FLEX

## 属性

| | |
|---|---|
| **适用介质** | Filtered (50 µm), unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| **工作压力** | 1 to 8 bar |
| **温度范围** | -15 °C to +80 °C |
| **壳体** | Jacket made from anodised aluminium alloy |
| **内/外带** | Stainless steel |
| **滑块(活塞导向件)** | Anodised aluminium alloy |
| **密封材料** | NBR for speeds up to 1 m/s |



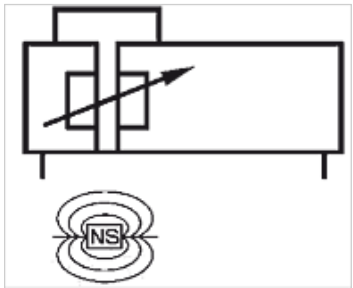


## 描述

These double-acting cylinders can also be supplied with strokes greater than 5 m, providing the stroke length is approximately equal to the overall length. They are equipped with magnets as standard for indicating the position as well as pneumatic, adjustable end position cushioning. Limit switches and hydraulic shock absorbers can be mounted as add-on modules.

## 订购指南

All strokes can also be supplied in 1 mm steps on request. Ø 16 to 5000 mm, Ø 25, 32, 40 to 5700 mm and Ø 63 to 5500 mm. Versions with an integrated linear guide can be supplied on request (up to 50 x lateral load).

## 附加信息

Important: The scope of supply does not include a connector. Please order separately.

## 货品

| 名称 | 6 巴压力 (N) | 活塞直径 Ø | 行程 (mm) | 接口 | 最大侧向负荷 |
|---|---|---|---|---|---|
| **K- 07 15 07 34** | 110 | 16 mm | 100 | M 5 | 0.3 Nm |
| **K- 07 15 07 35** | 110 | 16 mm | 200 | M 5 | 0.3 Nm |
| **K- 07 15 07 36** | 110 | 16 mm | 300 | M 5 | 0.3 Nm |
| **K- 07 15 07 37** | 110 | 16 mm | 400 | M 5 | 0.3 Nm |
| **K- 07 15 07 38** | 110 | 16 mm | 500 | M 5 | 0.3 Nm |
| **K- 07 15 07 39** | 110 | 16 mm | 600 | M 5 | 0.3 Nm |
| **K- 07 15 07 40** | 110 | 16 mm | 700 | M 5 | 0.3 Nm |
| **K- 07 15 07 41** | 110 | 16 mm | 800 | M 5 | 0.3 Nm |
| **K- 07 15 07 42** | 110 | 16 mm | 900 | M 5 | 0.3 Nm |
| **K- 07 15 07 43** | 110 | 16 mm | 1000 | M 5 | 0.3 Nm |
| **K- 07 15 07 44** | 110 | 16 mm | 1200 | M 5 | 0.3 Nm |
| **K- 07 15 07 45** | 110 | 16 mm | 1400 | M 5 | 0.3 Nm |
| **K- 07 15 07 46** | 110 | 16 mm | 2000 | M 5 | 0.3 Nm |
| **K- 07 15 07 47** | 250 | 25 mm | 100 | G 1/8 | 1.0 Nm |
| **K- 07 15 07 48** | 250 | 25 mm | 200 | G 1/8 | 1.0 Nm |
| **K- 07 15 07 49** | 250 | 25 mm | 300 | G 1/8 | 1.0 Nm |
| **K- 07 15 07 50** | 250 | 25 mm | 400 | G 1/8 | 1.0 Nm |
| **K- 07 15 07 51** | 250 | 25 mm | 500 | G 1/8 | 1.0 Nm |
| **K- 07 15 07 52** | 250 | 25 mm | 600 | G 1/8 | 1.0 Nm |
| **K- 07 15 07 53** | 250 | 25 mm | 700 | G 1/8 | 1.0 Nm |
| **K- 07 15 07 54** | 250 | 25 mm | 800 | G 1/8 | 1.0 Nm |
| **K- 07 15 07 55** | 250 | 25 mm | 900 | G 1/8 | 1.0 Nm |
| **K- 07 15 07 56** | 250 | 25 mm | 1000 | G 1/8 | 1.0 Nm |
| **K- 07 15 07 57** | 250 | 25 mm | 1200 | G 1/8 | 1.0 Nm |
| **K- 07 15 07 58** | 250 | 25 mm | 1400 | G 1/8 | 1.0 Nm |
| **K- 07 15 07 59** | 250 | 25 mm | 2000 | G 1/8 | 1.0 Nm |
| **K- 07 15 07 60** | 420 | 32 mm | 100 | G 1/4 | 2.0 Nm |
| **K- 07 15 07 61** | 420 | 32 mm | 200 | G 1/4 | 2.0 Nm |
| **K- 07 15 07 62** | 420 | 32 mm | 300 | G 1/4 | 2.0 Nm |
| **K- 07 15 07 63** | 420 | 32 mm | 400 | G 1/4 | 2.0 Nm |
| **K- 07 15 07 64** | 420 | 32 mm | 500 | G 1/4 | 2.0 Nm |
| **K- 07 15 07 65** | 420 | 32 mm | 600 | G 1/4 | 2.0 Nm |
| **K- 07 15 07 66** | 420 | 32 mm | 700 | G 1/4 | 2.0 Nm |
| **K- 07 15 07 67** | 420 | 32 mm | 800 | G 1/4 | 2.0 Nm |
| **K- 07 15 07 68** | 420 | 32 mm | 900 | G 1/4 | 2.0 Nm |

*尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。*

## 货品

| 名称 | 6 巴压力 (N) | 活塞直径 Ø | 行程 (mm) | 接口 | 最大侧向负荷 |
|---|---|---|---|---|---|
| **K- 07 15 07 69** | 420 | 32 mm | 1000 | G 1/4 | 2.0 Nm |
| **K- 07 15 07 70** | 420 | 32 mm | 1200 | G 1/4 | 2.0 Nm |
| **K- 07 15 07 71** | 420 | 32 mm | 1400 | G 1/4 | 2.0 Nm |
| **K- 07 15 07 72** | 420 | 32 mm | 2000 | G 1/4 | 2.0 Nm |
| **K- 07 15 07 73** | 640 | 40 mm | 100 | G 1/4 | 4.0 Nm |
| **K- 07 15 07 74** | 640 | 40 mm | 200 | G 1/4 | 4.0 Nm |
| **K- 07 15 07 75** | 640 | 40 mm | 300 | G 1/4 | 4.0 Nm |
| **K- 07 15 07 76** | 640 | 40 mm | 400 | G 1/4 | 4.0 Nm |
| **K- 07 15 07 77** | 640 | 40 mm | 500 | G 1/4 | 4.0 Nm |
| **K- 07 15 07 78** | 640 | 40 mm | 600 | G 1/4 | 4.0 Nm |
| **K- 07 15 07 79** | 640 | 40 mm | 700 | G 1/4 | 4.0 Nm |
| **K- 07 15 07 80** | 640 | 40 mm | 800 | G 1/4 | 4.0 Nm |
| **K- 07 15 07 81** | 640 | 40 mm | 900 | G 1/4 | 4.0 Nm |
| **K- 07 15 07 82** | 640 | 40 mm | 1000 | G 1/4 | 4.0 Nm |
| **K- 07 15 07 83** | 640 | 40 mm | 1200 | G 1/4 | 4.0 Nm |
| **K- 07 15 07 84** | 640 | 40 mm | 1400 | G 1/4 | 4.0 Nm |
| **K- 07 15 07 85** | 640 | 40 mm | 2000 | G 1/4 | 4.0 Nm |
| **K- 07 15 07 86** | 1550 | 63 mm | 100 | G 3/8 | 8.0 Nm |
| **K- 07 15 07 87** | 1550 | 63 mm | 200 | G 3/8 | 8.0 Nm |
| **K- 07 15 07 88** | 1550 | 63 mm | 300 | G 3/8 | 8.0 Nm |
| **K- 07 15 07 89** | 1550 | 63 mm | 400 | G 3/8 | 8.0 Nm |
| **K- 07 15 07 90** | 1550 | 63 mm | 500 | G 3/8 | 8.0 Nm |
| **K- 07 15 07 91** | 1550 | 63 mm | 600 | G 3/8 | 8.0 Nm |
| **K- 07 15 07 92** | 1550 | 63 mm | 700 | G 3/8 | 8.0 Nm |
| **K- 07 15 07 93** | 1550 | 63 mm | 800 | G 3/8 | 8.0 Nm |
| **K- 07 15 07 94** | 1550 | 63 mm | 900 | G 3/8 | 8.0 Nm |
| **K- 07 15 07 95** | 1550 | 63 mm | 1000 | G 3/8 | 8.0 Nm |
| **K- 07 15 07 96** | 1550 | 63 mm | 1200 | G 3/8 | 8.0 Nm |
| **K- 07 15 07 97** | 1550 | 63 mm | 1400 | G 3/8 | 8.0 Nm |
| **K- 07 15 07 98** | 1550 | 63 mm | 2000 | G 3/8 | 8.0 Nm |

## 附件

| | |
|---|---|
| **K-FUSSBEFESTIGUNG 4** | Foot model |
| **K-ZST** | Intermediate foot |
| **K-SENSOREN T-NUT 1** | Sensor for T-slot |
| **K-ABDECKBAENDER** | Bar for grooving (500 mm) |


*尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。*