


K-RUNDZYLINDER DOPP O D

Miniature cylinders, double acting (magnetic, non-cushioned)

HANSA FLEX

属性

| | |
|------|---|
| 适用介质 | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| 工作压力 | Max. 10 bar |
| 起动力 | 0,8 bar (Ø 8 bis Ø 12), 0,6 bar (Ø 16 bis Ø 25) |
| 温度范围 | -10 °C to +80 °C |
| 结构 | Flanged joint between stainless steel barrel and heads |
| 活塞杆 | C45 steel, hard chrome-plated |
| 管 | Stainless steel 1.4301 |
| 活塞 | Synthetic (acetal) resin |
| 密封材料 | NBR |

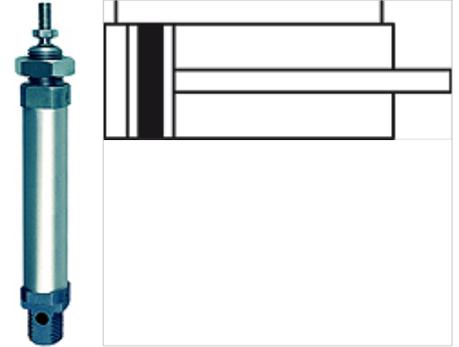

提示

Maximum recommended stroke: Double-acting: Ø 8 - Ø 10 = 100 stroke, Ø 12 - Ø 16 = 200 stroke, Ø 20 - Ø 25 = 250 stroke
Single-acting: Ø 8 - Ø 25 = 50 stroke. Longer stroke lengths can cause operational malfunctions.
其它数据应客户要求提供。

描述

Single and double-acting cylinders, with magnetic piston.

附加信息

Important: The scope of supply does not include a connector. Please order separately.

货品

| 名称 | 活塞直径 Ø | 行程 (mm) | 接口 | 活塞杆螺纹 |
|----------------|--------|---------|-------|-------|
| K- 07 15 16 67 | 8 mm | 10 | M 5 | M 4 |
| K- 07 15 16 68 | 8 mm | 25 | M 5 | M 4 |
| K- 07 15 16 69 | 8 mm | 50 | M 5 | M 4 |
| K- 07 15 16 70 | 8 mm | 80 | M 5 | M 4 |
| K- 07 15 16 71 | 8 mm | 100 | M 5 | M 4 |
| K- 07 15 16 72 | 10 mm | 10 | M 5 | M 4 |
| K- 07 15 16 73 | 10 mm | 25 | M 5 | M 4 |
| K- 07 15 16 74 | 10 mm | 50 | M 5 | M 4 |
| K- 07 15 16 75 | 10 mm | 80 | M 5 | M 4 |
| K- 07 15 16 76 | 10 mm | 100 | M 5 | M 4 |
| K- 07 15 16 77 | 12 mm | 10 | M 5 | M 6 |
| K- 07 15 16 78 | 12 mm | 25 | M 5 | M 6 |
| K- 07 15 16 79 | 12 mm | 50 | M 5 | M 6 |
| K- 07 15 16 80 | 12 mm | 80 | M 5 | M 6 |
| K- 07 15 16 81 | 12 mm | 100 | M 5 | M 6 |
| K- 07 15 16 82 | 12 mm | 125 | M 5 | M 6 |
| K- 07 15 16 83 | 12 mm | 160 | M 5 | M 6 |
| K- 07 15 16 84 | 12 mm | 200 | M 5 | M 6 |
| K- 07 15 16 85 | 16 mm | 10 | M 5 | M 6 |
| K- 07 15 16 86 | 16 mm | 25 | M 5 | M 6 |
| K- 07 15 16 87 | 16 mm | 50 | M 5 | M 6 |
| K- 07 15 16 88 | 16 mm | 80 | M 5 | M 6 |
| K- 07 15 16 89 | 16 mm | 100 | M 5 | M 6 |
| K- 07 15 16 90 | 16 mm | 125 | M 5 | M 6 |
| K- 07 15 16 91 | 16 mm | 160 | M 5 | M 6 |
| K- 07 15 16 92 | 16 mm | 200 | M 5 | M 6 |
| K- 07 15 16 93 | 20 mm | 10 | G 1/8 | M 8 |
| K- 07 15 16 94 | 20 mm | 25 | G 1/8 | M 8 |
| K- 07 15 16 95 | 20 mm | 50 | G 1/8 | M 8 |
| K- 07 15 16 96 | 20 mm | 80 | G 1/8 | M 8 |
| K- 07 15 16 97 | 20 mm | 100 | G 1/8 | M 8 |
| K- 07 15 16 98 | 20 mm | 125 | G 1/8 | M 8 |
| K- 07 15 16 99 | 20 mm | 160 | G 1/8 | M 8 |
| K- 07 15 17 00 | 20 mm | 200 | G 1/8 | M 8 |



尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。

17.04.2026

HANSA-FLEX AG

www.hansa-flex.com

1

K-RUNDZYLINDER DOPP O D

Miniature cylinders, double acting (magnetic, non-cushioned)

HANSA FLEX

货品

| 名称 | 活塞直径 Ø | 行程 (mm) | 接口 | 活塞杆螺纹 |
|----------------|--------|---------|-------|-------------|
| K- 07 15 17 01 | 20 mm | 250 | G 1/8 | M 8 |
| K- 07 15 17 02 | 25 mm | 10 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 03 | 25 mm | 25 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 04 | 25 mm | 50 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 05 | 25 mm | 80 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 06 | 25 mm | 100 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 07 | 25 mm | 125 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 08 | 25 mm | 160 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 09 | 25 mm | 200 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 10 | 25 mm | 250 | G 1/8 | M 10 x 1.25 |

附件

| | |
|-----------------------------|--------------------------------------|
| K-FUSSBEFESTIGUNG 5 | Foot model |
| K-FLANSCHBEFESTIGUNGEN1 | Flange model |
| K-KOPFMUTTER DECKEL BODEN 2 | Hexagon nut (for head) |
| K-GABELKOEPFER 3 | Fork model |
| K-GELENKAUGEN 2 | Rod eye model |
| K-SCHWENKLAGER 1 | Counter-hinge model |
| K-SENSORHALTER | Sensor support (with T-slot adapter) |
| K-SENSOREN T-NUT 1 | Sensor for T-slot |