


K-STOPPVENTILE STECK

Stop valves, ports 2 and 3 with plug connection

HANSA FLEX

属性

| | |
|------|---|
| 工作压力 | Max. 10 bar |
| 控制压力 | 1 - 5 bar, depending on operating pressure |
| 介质温度 | max. 70 °C |
| 装入位置 | Any. Ring pieces can still be rotated 360° after the valve has been tightened |
| 密封材料 | Perbunan |

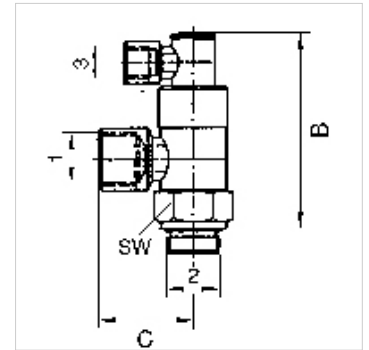

提示

其它数据应客户要求提供。

描述

For high-speed positioning and stop functions as well as emergency switching (e.g. emergency stop). If a control signal is present at port 3, air can flow to and from the cylinder. If no control signal is present, the air flow to and from the cylinder is shut off, causing the cylinder to stop in the required position. Stop valves are screwed directly onto the cylinder instead of the normal pipe connections.

货品

| 名称 | Port 1 | Port 2 | 接口 3 | 原料 | B (mm) | C (mm) |
|----------------|--------|--------|------|---------------------|-----------|-----------|
| K- 07 15 20 50 | G 1/8 | 6 mm | 4 mm | Nickel-plated brass | 52,0 | 25,0 |
| K- 07 15 20 49 | G 1/4 | 6 mm | 4 mm | Nickel-plated brass | 58,0 | 28,0 |
| K- 07 15 20 51 | G 3/8 | 8 mm | 4 mm | Nickel-plated brass | 63,0 | 32,0 |
| K- 07 15 20 48 | G 1/2 | 12 mm | 4 mm | Nickel-plated brass | 72,0 | 41,0 |