


K-FI MIKRO PC-BEHAEL SCHU MULTIFIX

Micro-filters with polycarbonate bowl and bowl guard

HANSA FLEX

属性

| | |
|-------------|--|
| 入口压力 | Max. 16 bar |
| 介质温度 | max. 60 °C |
| 环境温度 | Max. 60 °C |
| 过滤精度 | 0,01 µm |
| 效率 | 99.999 % |
| 密封材料 | NBR |
| 过滤器滤芯 | Borosilicate-POM |
| 壳体 | Die-cast zinc |
| Drain valve | Semi-automatic |
| 流量值测量 | FM at P1 = 6 bar and $\Delta p = 0.09$ bar |

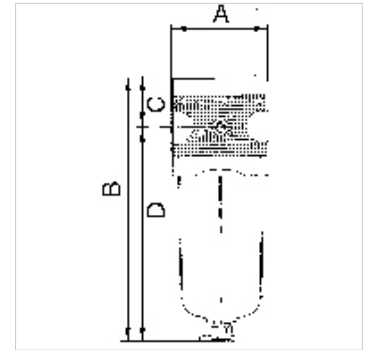

提示

* = Dimensions with adapter plate!

其它数据应客户要求提供。

描述

Micro-filters for compliance with strict compressed air purity requirements. Suitable for all applications where standard filters do not afford the desired efficiency.

附加信息

on Art. K-07250721: Max. inlet pressure 300 bar. Other cylinder pressure regulators available on request.

货品

| 名称 | 螺纹 | 流量 (L/min) | A (mm) | B | C (mm) | D (mm) | DN | 结构尺寸 |
|----------------|-------|---------------|-----------|----------------------|-----------|-----------|----|------|
| K- 07 25 10 60 | G 1/4 | 280 | 47,8 | 152,1 mm | 27,0 | 125,1 | 6 | 1 |
| K- 07 25 10 63 | G 1/2 | 720 | 68,8 | 180,8 mm (185,8 mm)* | 72,0 | 147,3 | 15 | 2 |

备件

| | |
|----------------------------------|---------------------------|
| K-HALTERBAUSATZ MULTIFIX | Holder |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-KOPPELPAKET SCHMA | Coupling packet |
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |
| K-PC-BEHAELTER FILTER MULTIFIX | Polycarbonate tank filter |
| K-METALLBEHAELTER OELER MULTIFIX | Metal tank oiler |