
K-VHR IS BUND ES


Hexagon socket screw plugs with collar

HANSA-FLEX

属性

工作压力	Max. 20 bar
结构类型	内六角闭锁螺钉
原料	不锈钢 1.4571



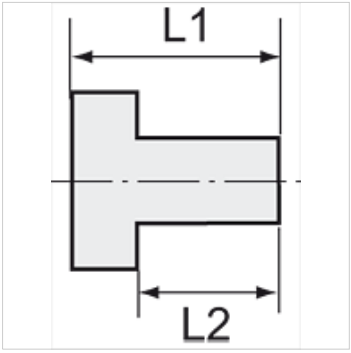

提示

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
其它数据应客户要求提供。

附加信息

Further types and dimensions on request.

货品

名称	螺纹	L1 (mm)	L2 (mm)	SW
K- 07 40 39 65	G 1/8	11,0	8,0	5 mm
K- 07 40 39 66	G 1/4	13,0	10,0	6 mm
K- 07 40 39 67	G 3/8	15,0	12,0	8 mm
K- 07 40 39 68	G 1/2	18,0	14,0	10 mm
K- 07 40 45 22	G 3/4	20,0	16,0	12 mm
K- 07 40 45 25	G 1	21,0	16,0	17 mm

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。