

K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

HANSA FLEX

属性

温度范围 -20 °C to +60 °C

压力 Max. 12 bar


压力范围 Max. 12 bar

温度 -20 °C to +60 °C

流量 0 - 400 l/min

弹簧 Stainless-steel

壳体 Brass

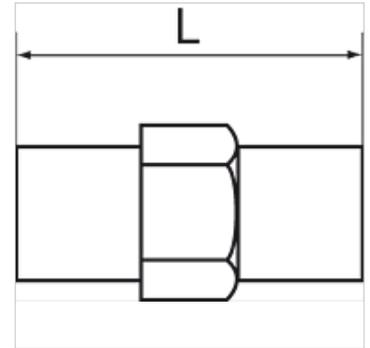

提示

其它数据应客户要求提供。

描述

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

货品

名称	螺纹	工作压力已预设	L (mm)
K- 07 25 03 03	G 1/4 außen/male	2 bar	24,0
K- 07 25 03 04	G 1/4 außen/male	4 bar	24,0
K- 07 25 03 05	G 1/4 außen/male	6 bar	24,0