


K-XV ARG-K MS NI

Double nipples, conical male thread - nickel-plated brass

HANSA FLEX

属性

| | |
|------|-------------|
| 工作温度 | Max. 150 °C |
| 压力 | Max. 60 bar |
| 原料 | 黄铜镀镍 |

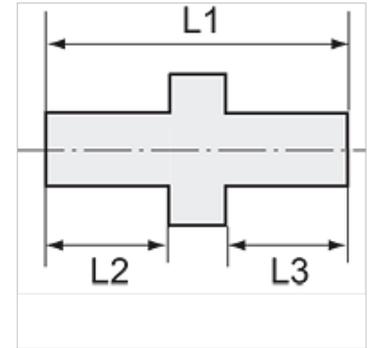

提示

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. 其它数据应客户要求提供。

描述

Suitable for air, water, oil, steam, etc.

附加信息

Further types and dimensions on request.

货品

| 名称 | 螺纹 1 | 螺纹 2 | L1 (mm) | L2 (mm) | L3 (mm) | SW |
|----------------|-------|-------|------------|------------|------------|-------|
| K- 07 40 12 60 | R 1/8 | R 1/8 | 21,0 | 8,0 | 8,0 | 12 mm |
| K- 07 40 12 61 | R 1/8 | R 1/4 | 24,0 | 11,0 | 8,0 | 14 mm |
| K- 07 40 12 62 | R 1/8 | R 3/8 | 25,0 | 11,5 | 8,0 | 17 mm |
| K- 07 40 12 63 | R 1/4 | R 1/4 | 27,0 | 11,0 | 11,0 | 14 mm |
| K- 07 40 12 64 | R 1/4 | R 3/8 | 28,0 | 11,5 | 11,0 | 17 mm |
| K- 07 40 12 65 | R 1/4 | R 1/2 | 32,0 | 14,0 | 11,0 | 22 mm |
| K- 07 40 12 66 | R 3/8 | R 3/8 | 29,0 | 11,5 | 11,5 | 17 mm |
| K- 07 40 12 67 | R 3/8 | R 1/2 | 32,5 | 14,0 | 11,5 | 22 mm |
| K- 07 40 12 68 | R 1/2 | R 1/2 | 35,0 | 14,0 | 14,0 | 22 mm |
| K- 07 40 12 69 | R 1/2 | R 3/4 | 37,0 | 16,5 | 14,0 | 27 mm |
| K- 07 40 12 71 | R 3/4 | R 3/4 | 40,0 | 16,5 | 16,5 | 27 mm |
| K- 07 40 12 70 | R 3/4 | R 1 | 42,5 | 19,0 | 16,5 | 34 mm |
| K- 07 40 12 72 | R 1 | R 1 | 45,5 | 19,0 | 19,0 | 34 mm |