K-S-BKR M ENTL ABSCHL


Safety ball valves lockable, with relief port

HANSA-FLEX

属性

工作压力	最大 10 巴
工作温度	-20 °C to max. +100 °C
排气孔	M 5
螺纹描述	Rp thread acc. to ISO 7-1
手柄	Stainless steel - PVC coated
球密封	PTFE / NBR
主轴密封	PTFE
原料	不锈钢



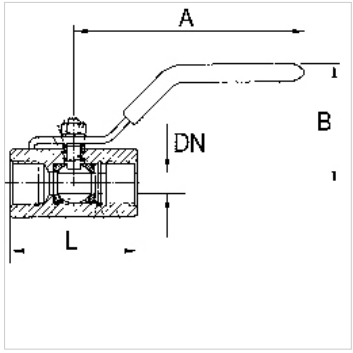

提示

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)
其它数据应客户要求提供。

描述

2/2-way stainless steel safety ball valves. Specially designed for pneumatic applications. The ball valve can be locked manually and has a relief port.

附加信息

The price does not include a padlock. Please order separately.

货品

名称	DN	螺纹	A (mm)	B (mm)	L (mm)
K- 07 30 15 16	8	Rp 1/4	100,0	50,0	55,0
K- 07 30 15 17	10	Rp 3/8	100,0	50,0	55,0
K- 07 30 15 18	15	Rp 1/2	130,0	60,0	65,0
K- 07 30 15 19	20	Rp 3/4	130,0	64,0	74,6
K- 07 30 15 20	25	Rp 1	165,0	71,0	88,0
K- 07 30 15 21	32	Rp 1 1/4	165,0	78,0	102,0
K- 07 30 15 22	40	Rp 1 1/2	190,0	86,0	110,0
K- 07 30 15 23	50	Rp 2	190,0	95,0	125,0

附件

K-VORHAENGESCHLOSS	Padlock

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。