


K-3/2 ABSPERRVENTILE HW SCHL G-MINI

3/2-way shut-off valve

HANSA FLEX

属性

| | |
|--------|--|
| 入口压力 | 0 - 9 bar |
| 介质温度 | max. 70 °C |
| 环境温度 | Max. 70 °C |
| 排气接口 | G 1/4 |
| 密封材料 | NBR |
| 壳体 | Die-cast aluminium |
| 塞子 | Plastic |
| 流量值测量 | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| 更多注明信息 | User manual on request |

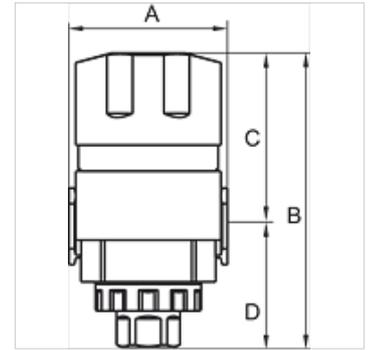

货品

| 名称 | 螺纹 | 流量 (L/min) | A (mm) | B | C (mm) | D (mm) | 结构尺寸 |
|----------------|-------|---------------|-----------|---------|-----------|-----------|------|
| K- 07 25 12 29 | G 1/8 | 1750 | 38,0 | 89,0 mm | 52,5 | 36,5 | 200 |
| K- 07 25 12 30 | G 1/4 | 1750 | 38,0 | 89,0 mm | 52,5 | 36,5 | 200 |

附件

| | |
|-----------------------|-----------------|
| K-VERBINDUNGSELEMENTE | Connecting sets |
| K-WANDHALTER | Wall bracket |
| K-HALTERBAUSATZ | Holder |