



K-XRD STECKANSCHLUSS Z SCH AGR OR

Straight non-return valves, flow direction from port to tube, parallel male thread with O-ring

HANSA FLEX

属性

工作压力	Max. 10 bar, vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	压缩空气
标准	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring
温度范围	0 °C to +60 °C
密封面	O-ring (NBR)
原料	Plastic, Nickel plated brass
紧压环	Plastic

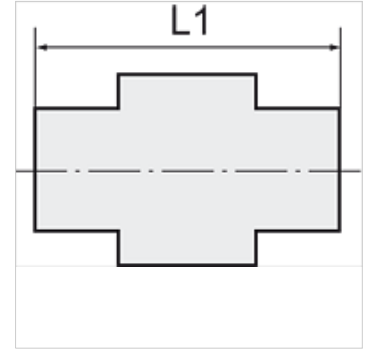

提示

其它数据应客户要求提供。

描述

The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

货品

名称	螺纹	用于软管外径-Ø	L1 (mm)	开口压力 (bar)	SW
K- 07 40 08 73	M 5	4 mm	31,0	0,2	10 mm
K- 07 40 08 68	G 1/8	4 mm	24,2	0,2	14 mm
K- 07 40 08 69	G 1/8	6 mm	31,0	0,2	14 mm
K- 07 40 08 70	G 1/8	8 mm	32,8	0,2	14 mm
K- 07 40 08 66	G 1/4	6 mm	33,0	0,2	17 mm
K- 07 40 08 67	G 1/4	8 mm	34,8	0,2	17 mm
K- 07 40 08 71	G 3/8	10 mm	41,0	0,2	20 mm
K- 07 40 08 72	G 3/8	12 mm	42,5	0,2	21 mm
K- 07 40 08 64	G 1/2	10 mm	43,0	0,2	24 mm
K- 07 40 08 65	G 1/2	12 mm	44,5	0,2	24 mm