


K-NORMZYLINDER AIRSENTIALS SE

Standard cylinders - AirSentials

HANSA FLEX

属性

| | |
|----------|---|
| 适用介质 | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| 工作压力 | 1 - 10 bar |
| 温度范围 | -20 °C to +80 °C |
| 活塞杆 | Hardened steel, thick-chromed |
| 管 | Aluminium jacket with integrated T-slots |
| 活塞 | Aluminium |
| 活塞密封件 | TPU (thermoplastic polyurethane) |
| 活塞杆密封件 | TPU (thermoplastic polyurethane) |
| O 型环密封材料 | NBR |

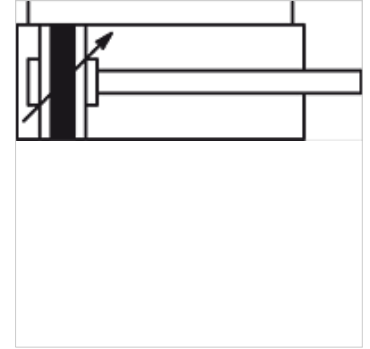

提示

其它数据应客户要求提供。

描述

These cylinders are ideal for a wide range of applications owing to their robust design and excellent value for money. The standard type has a double-acting cylinder and features a magnetic piston as well as integrated cushioning. The magnetic switches are mounted in T-slots on three sides of the body.

附加信息

Important: The scope of supply does not include a connector. Please order separately.

Stroke 1000 available on request.

货品

| 名称 | 活塞直径 Ø | 行程 (mm) | 接口 | 活塞杆直径 Ø (mm) | 活塞杆外螺纹 |
|----------------|--------|---------|-------|--------------|-------------|
| K- 07 15 14 66 | 32 mm | 25 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 67 | 32 mm | 50 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 68 | 32 mm | 75 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 69 | 32 mm | 80 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 70 | 32 mm | 100 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 71 | 32 mm | 125 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 72 | 32 mm | 150 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 73 | 32 mm | 160 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 74 | 32 mm | 175 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 75 | 32 mm | 200 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 76 | 32 mm | 250 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 77 | 32 mm | 300 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 78 | 32 mm | 350 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 79 | 32 mm | 400 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 89 | 40 mm | 160 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 80 | 32 mm | 450 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 81 | 32 mm | 500 | G 1/8 | 12 | M 10 x 1.25 |
| K- 07 15 14 82 | 40 mm | 25 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 83 | 40 mm | 50 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 84 | 40 mm | 75 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 85 | 40 mm | 80 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 86 | 40 mm | 100 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 87 | 40 mm | 125 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 88 | 40 mm | 150 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 90 | 40 mm | 175 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 91 | 40 mm | 200 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 92 | 40 mm | 250 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 93 | 40 mm | 300 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 94 | 40 mm | 350 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 95 | 40 mm | 400 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 96 | 40 mm | 450 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 97 | 40 mm | 500 | G 1/4 | 16 | M 12 x 1.25 |
| K- 07 15 14 98 | 40 mm | 600 | G 1/4 | 16 | M 12 x 1.25 |



尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。

05.07.2024

HANSA-FLEX AG

www.hansa-flex.com

1

K-NORMZYLINDER AIRSENTIALS SE

Standard cylinders - AirSentials



货品

| 名称 | 活塞直径 Ø | 行程 (mm) | 接口 | 活塞杆直径 Ø (mm) | 活塞杆外螺纹 |
|---------------|--------|---------|-------|--------------|-------------|
| K-07 15 14 99 | 40 mm | 700 | G 1/4 | 16 | M 12 x 1.25 |
| K-07 15 15 00 | 40 mm | 800 | G 1/4 | 16 | M 12 x 1.25 |
| K-07 15 15 01 | 50 mm | 25 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 02 | 50 mm | 50 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 03 | 50 mm | 75 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 04 | 50 mm | 80 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 05 | 50 mm | 100 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 06 | 50 mm | 1000 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 07 | 50 mm | 125 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 08 | 50 mm | 150 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 09 | 50 mm | 160 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 10 | 50 mm | 175 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 11 | 50 mm | 200 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 12 | 50 mm | 250 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 13 | 50 mm | 300 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 14 | 50 mm | 350 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 15 | 50 mm | 400 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 16 | 50 mm | 450 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 17 | 50 mm | 500 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 18 | 50 mm | 600 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 19 | 50 mm | 700 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 20 | 50 mm | 800 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 21 | 50 mm | 900 | G 1/4 | 20 | M 16 x 1.5 |
| K-07 15 15 22 | 63 mm | 25 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 23 | 63 mm | 50 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 24 | 63 mm | 75 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 25 | 63 mm | 80 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 26 | 63 mm | 100 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 27 | 63 mm | 1000 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 28 | 63 mm | 125 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 29 | 63 mm | 150 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 30 | 63 mm | 160 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 31 | 63 mm | 175 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 32 | 63 mm | 200 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 33 | 63 mm | 250 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 34 | 63 mm | 300 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 35 | 63 mm | 350 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 36 | 63 mm | 400 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 37 | 63 mm | 450 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 38 | 63 mm | 500 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 39 | 63 mm | 600 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 40 | 63 mm | 700 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 41 | 63 mm | 800 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 42 | 63 mm | 900 | G 3/8 | 20 | M 16 x 1.5 |
| K-07 15 15 43 | 80 mm | 25 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 44 | 80 mm | 50 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 45 | 80 mm | 75 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 46 | 80 mm | 80 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 47 | 80 mm | 100 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 48 | 80 mm | 1000 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 49 | 80 mm | 125 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 50 | 80 mm | 150 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 51 | 80 mm | 160 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 52 | 80 mm | 175 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 53 | 80 mm | 200 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 54 | 80 mm | 250 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 55 | 80 mm | 300 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 56 | 80 mm | 350 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 57 | 80 mm | 400 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 58 | 80 mm | 450 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 59 | 80 mm | 500 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 60 | 80 mm | 600 | G 3/8 | 25 | M 20 x 1.5 |
| K-07 15 15 61 | 80 mm | 700 | G 3/8 | 25 | M 20 x 1.5 |



尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。

05.07.2024

HANSA-FLEX AG

www.hansa-flex.com

K-NORMZYLINDER AIRSENTIALS SE

Standard cylinders - AirSentials



货品

| 名称 | 活塞直径 Ø | 行程 (mm) | 接口 | 活塞杆直径 Ø (mm) | 活塞杆外螺纹 |
|----------------|--------|---------|--------|--------------|------------|
| K- 07 15 15 62 | 80 mm | 800 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 15 63 | 80 mm | 900 | G 3/8 | 25 | M 20 x 1.5 |
| K- 07 15 14 26 | 100 mm | 25 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 27 | 100 mm | 50 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 28 | 100 mm | 75 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 29 | 100 mm | 80 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 30 | 100 mm | 100 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 31 | 100 mm | 125 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 32 | 100 mm | 150 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 33 | 100 mm | 160 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 34 | 100 mm | 175 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 35 | 100 mm | 200 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 36 | 100 mm | 250 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 37 | 100 mm | 300 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 38 | 100 mm | 350 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 39 | 100 mm | 400 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 40 | 100 mm | 450 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 41 | 100 mm | 500 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 42 | 100 mm | 600 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 43 | 100 mm | 700 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 44 | 100 mm | 800 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 45 | 100 mm | 900 | G 1/2" | 25 | M 20 x 1.5 |
| K- 07 15 14 46 | 125 mm | 25 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 47 | 125 mm | 50 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 48 | 125 mm | 75 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 49 | 125 mm | 80 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 50 | 125 mm | 100 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 51 | 125 mm | 125 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 52 | 125 mm | 150 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 53 | 125 mm | 160 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 54 | 125 mm | 175 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 55 | 125 mm | 200 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 56 | 125 mm | 250 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 57 | 125 mm | 300 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 58 | 125 mm | 350 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 59 | 125 mm | 400 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 60 | 125 mm | 450 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 61 | 125 mm | 500 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 62 | 125 mm | 600 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 63 | 125 mm | 700 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 64 | 125 mm | 800 | G 1/2" | 32 | M 27 x 2 |
| K- 07 15 14 65 | 125 mm | 900 | G 1/2" | 32 | M 27 x 2 |

附件

| | |
|--------------------------------|---|
| K-FUSSBEFESTIGUNG TYP LB 2 | Foot model, »LB« type |
| K-SCHWENKLAGEBOECKE TYP TF | Hinge bracket model, »TF« type (only in conjunction with hinge head model, »FTC« type) |
| K-GEGENLAGER TYP CR | Counter-hinge model, »CR« type (only in conjunction with female hinge model, »CB« type) |
| K-SCHWENKGABELBEFESTIG FTC | Hinge head model, »FTC« type |
| K-SCHWENKLAGE TYP TM | Hinge model, »TM« type (only in conjunction with hinge head model, »FTC« type) |
| K-SCHWENKGABELBEFESTIG CB | Female hinge model, »CB« type |
| K-SCHWENKAUGENBEFESTIG CA | Male hinge model, »CA« type |
| K-FLANSCHBEFESTIGUNG TYP FA1 | Flange model, »FA« type |
| K-GABELKOEPE TYP Y | Fork model, »Y« type |
| K-GELENKAUGEN TYP UNIT | Rod eye model, »UNIT« type |
| K-SENSOREN CS1 NO MIT STECKER | Sensors »CS1« type, cable with M8 plug |
| K-SENSOREN CS1 NO OHNE STECKER | Sensors »CS1« type, cable without plug |