



# K-XRD STECKANSCHLUSS Z SCH AGR-K BE

Straight non-return valves, flow direction from port to tube, conical male thread, coated

**HANSA FLEX**

## 属性

工作压力	Max. 10 bar, vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	压缩空气
标准	R thread acc. to ISO 7-1, thread coating
温度范围	0 °C to +60 °C
密封面	Conical version: thread coating
原料	Plastic, Nickel plated brass
紧压环	Plastic

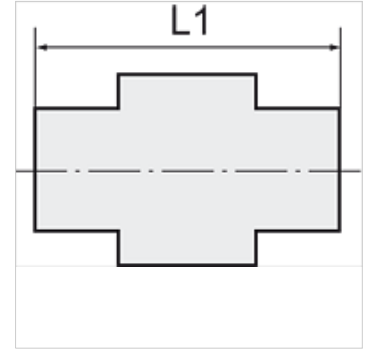

## 提示

其它数据应客户要求提供。

## 描述

The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

## 货品

名称	螺纹	用于软管外径-Ø	L1 (mm)	开口压力 (bar)	SW
K- 07 40 08 88	R 1/8	4 mm	24,0	0,2	10 mm
K- 07 40 08 89	R 1/8	6 mm	31,0	0,2	12 mm
K- 07 40 08 90	R 1/8	8 mm	32,8	0,2	14 mm
K- 07 40 08 86	R 1/4	6 mm	33,0	0,2	14 mm
K- 07 40 08 87	R 1/4	8 mm	34,8	0,2	14 mm
K- 07 40 08 91	R 3/8	10 mm	41,0	0,2	17 mm
K- 07 40 08 92	R 3/8	12 mm	42,5	0,2	21 mm
K- 07 40 08 84	R 1/2	10 mm	43,0	0,2	21 mm
K- 07 40 08 85	R 1/2	12 mm	44,5	0,2	21 mm