



# K-MEHRFACHVERT AG 4 1

Distributors with male thread, 4 outlets, swivel type, parallel male thread with O-ring (max. 10 bar)

**HANSA FLEX**

## 属性

工作压力	Max. 10 bar
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	Compressed air and all gases or liquids that are compatible with the materials
温度范围	-20 °C to +80 °C
密封面	Parallel version: O-ring in housing
原料	Plastic, Nickel plated brass
紧压环	Plastic

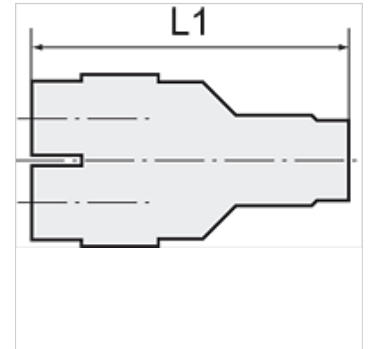

## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

名称	螺纹	用于软管外径-Ø	L1 (mm)
K- 07 40 43 43	G 1/8	4 mm	43,0
K- 07 40 43 44	G 1/8	6 mm	46,5
K- 07 40 43 41	G 1/4	4 mm	45,5
K- 07 40 43 42	G 1/4	6 mm	49,0