


# K-T-MEHRFACHVERT 3 STECKNIP

Tee distributors with push-in plug, 3 outlets

**HANSA FLEX**

## 属性

工作压力	Max. 15 bar, coarse vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	Compressed air and all gases or liquids that are compatible with the materials
温度范围	-20 °C to +80 °C
原料	Plastic, Nickel plated brass
紧压环	Plastic

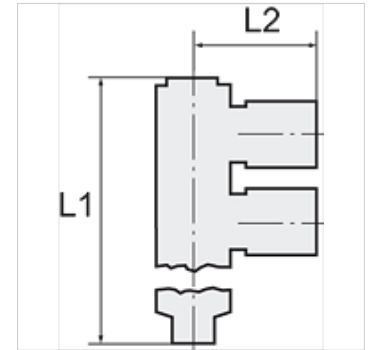

## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

名称	用于软管外径-Ø	L1 (mm)	L2 (mm)	插式内接头 (mm)
K- 07 40 43 54	3 x 4 mm	81,0	22,7	6
K- 07 40 43 55	3 x 4 mm	104,5	24,7	8
K- 07 40 43 56	3 x 6 mm	106,0	24,7	8
K- 07 40 43 57	3 x 8 mm	109,5	27,2	10