
K-X-STECKVERBINDUNG 1

X-unions

属性

工作压力	Max. 16 bar
工作温度	-20 °C to +80 °C
原料	黄铜镀镍
紧压环	Hostaform
张紧环	Stainless steel



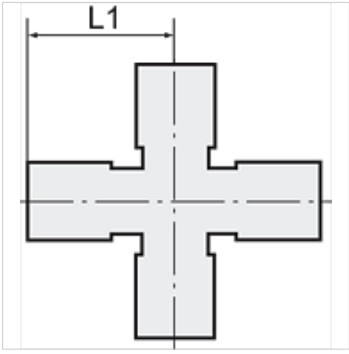

提示

其它数据应客户要求提供。

描述

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

货品

名称	用于软管外径-Ø	L1 (mm)
K- 07 40 47 29	4 mm	18,6
K- 07 40 47 30	6 mm	21,9
K- 07 40 47 31	8 mm	25,4

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。