


K-DRV ABLD GEW C SCHLITZ

Unidirectional flow control valves, outgoing air restriction (»C«), screw connection

HANSA FLEX

属性

| | |
|----------------|------------------------------------|
| 工作压力 | 最大 10 巴 |
| 温度范围 | 0 °C to +70 °C |
| 空心螺钉, 摆臂, 调节螺钉 | Nickel-plated brass |
| 内部部件 | Brass with a bare metal surface |
| O 形圈凸缘密封件 | NBR |
| 密封(防丢失) | Polyamide (glass fibre-reinforced) |

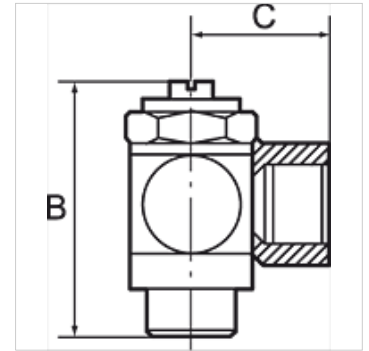

提示

其它数据应客户要求提供。

描述

For fine regulation of a cylinder piston speed and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece. Can be screwed directly onto the valve or cylinder. Compact type of construction, also ideal where space is restricted.

货品

| 名称 | 接口 | C (mm) | 螺纹 | SW | B (mm) |
|----------------|---------------------|--------|-------|-------|--------|
| K- 07 15 05 40 | M 5 female thread | 11,5 | M 5 | 8 mm | 24,5 |
| K- 07 15 05 45 | G 1/8 female thread | 16,0 | G 1/8 | 14 mm | 32,0 |
| K- 07 15 05 41 | G 1/4 female thread | 22,0 | G 1/4 | 17 mm | 40,0 |
| K- 07 15 25 24 | G 3/8 female thread | 26,0 | G 3/8 | 20 mm | 50,0 |
| K- 07 15 25 23 | G 1/2 female thread | 32,0 | G 1/2 | 26 mm | 61,0 |