



# K-VERSCHLUSSKAPPEN 10 BAR

Hexagonal caps (pressure max. 10 bar)

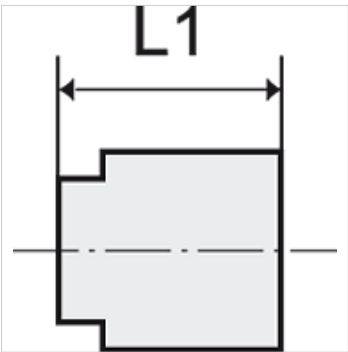

属性	
工作压力	Max. 15 bar, coarse vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	Compressed air and all gases or liquids that are compatible with the materials
温度范围	-20 °C to +80 °C
密封面	Parallel version: O-ring in housing, Conical version: thread coating
原料	Plastic, Nickel plated brass
紧压环	Plastic



## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

名称	用于软管外径-Ø	L1 (mm)
K- 07 40 42 96	3 mm	16,0
K- 07 40 42 97	4 mm	16,0
K- 07 40 42 98	6 mm	20,0
K- 07 40 42 99	8 mm	21,0
K- 07 40 43 00	10 mm	22,0
K- 07 40 43 01	12 mm	23,0
K- 07 40 43 02	16 mm	25,0