


# K-VERSCHLUSSKAPPEN 10 BAR

Hexagonal caps (pressure max. 10 bar)

**HANSA/FLEX**

## 属性

|       |  |
|-------|--|
| 工作压力  | Max. 15 bar, coarse vacuum   |
| 应用范围  | Air, vacuum  |
| 推荐的软管 | PU or PA (nylon)   |
| 适用介质  | Compressed air and all gases or liquids that are compatible with the materials |
| 温度范围  | -20 °C to +80 °C   |
| 密封面   | Parallel version: O-ring in housing, Conical version: thread coating           |
| 原料    | Plastic, Nickel plated brass   |
| 紧压环   | Plastic  |

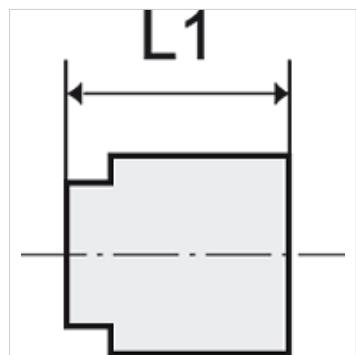

## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

| 名称             | 用于软管外径-Ø | L1<br>(mm) |
|----------------|----------|------------|
| K- 07 40 42 96 | 3 mm     | 16,0       |
| K- 07 40 42 97 | 4 mm     | 16,0       |
| K- 07 40 42 98 | 6 mm     | 20,0       |
| K- 07 40 42 99 | 8 mm     | 21,0       |
| K- 07 40 43 00 | 10 mm    | 22,0       |
| K- 07 40 43 01 | 12 mm    | 23,0       |
| K- 07 40 43 02 | 16 mm    | 25,0       |