


K-SCHALLDAE FEDEREINSTELLUNG

Adjustable spring silencers

HANSA FLEX

属性

| | |
|------|------------------|
| 工作压力 | 最大12巴 |
| 工作温度 | -10 °C to +80 °C |

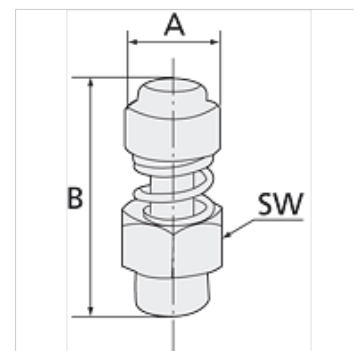

提示

其它数据应客户要求提供。

货品

| 名称 | 螺纹 | A (mm) | B 最大 (mm) | B 最小 (mm) | SW |
|----------------|-------|-----------|--------------|--------------|-------|
| K- 07 40 34 64 | G 1/8 | 12,0 | 28,0 | 26,0 | 13 mm |
| K- 07 40 34 65 | G 1/4 | 14,0 | 32,0 | 30,0 | 15 mm |
| K- 07 40 34 66 | G 3/8 | 17,0 | 38,0 | 36,0 | 22 mm |
| K- 07 40 34 67 | G 1/2 | 17,0 | 39,0 | 37,0 | 22 mm |
| K- 07 40 34 68 | G 3/4 | 32,0 | 50,0 | 46,0 | 30 mm |
| K- 07 40 34 69 | G 1 | 32,0 | 50,0 | 47,0 | 36 mm |