

# K-T-VB PP

## Union tees


### 属性

工作压力 on request

工作温度 Max. +20 °C

原料 Polypropylene (PP)

密封材料 NBR

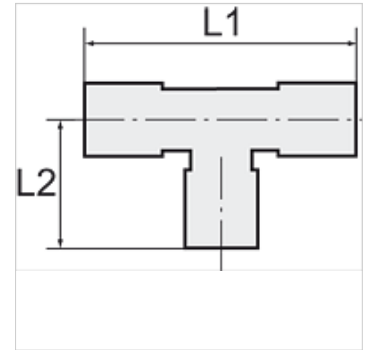

### 提示

其它数据应客户要求提供。

### 描述

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

### 货品

名称	用于软管外径-Ø	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7