



# K-STECKVERSCHR ABSP AGR OR

Straight stop valves, parallel male thread with O-ring

**HANSA FLEX**

## 属性

工作压力	Max. 10 bar, vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	压缩空气
标准	G thread acc. to DIN EN ISO 228-1, with O-Ring
温度范围	0 °C to +60 °C
密封面	O-ring (NBR)
原料	Plastic, Nickel plated brass
紧压环	Plastic

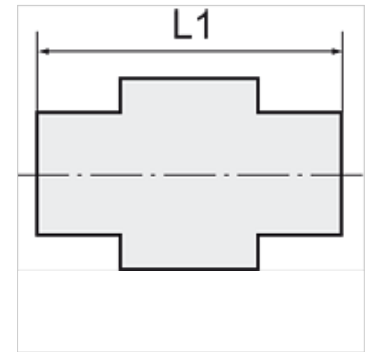

## 提示

其它数据应客户要求提供。

## 描述

The air supply is completely shut off as soon as the hose is disconnected from the union. <br>The flow rate is only guaranteed if the hose is securely inserted.

## 货品

名称	螺纹	用于软管外径-Ø	L1 (mm)	SW
K- 07 40 08 18	G 1/8	4 mm	27,5	14 mm
K- 07 40 08 19	G 1/8	6 mm	27,0	14 mm
K- 07 40 08 20	G 1/8	8 mm	29,0	14 mm
K- 07 40 08 16	G 1/4	6 mm	27,0	17 mm
K- 07 40 08 17	G 1/4	8 mm	29,0	17 mm
K- 07 40 08 15	G 1/4	10 mm	37,0	17 mm
K- 07 40 08 23	G 3/8	8 mm	29,0	20 mm
K- 07 40 08 21	G 3/8	10 mm	37,0	20 mm
K- 07 40 08 22	G 3/8	12 mm	38,0	21 mm
K- 07 40 08 13	G 1/2	10 mm	37,0	24 mm
K- 07 40 08 14	G 1/2	12 mm	38,0	24 mm