


# K-WV 5/3 PNEU ZENTRUM GESCHLOSS 4A

5/3-way pilot valve, mid-position closed

**HANSA FLEX**

## 属性

工作压力	1.5 - 8 bar
温度范围	Up to +70 °C
流量值测量	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar
操纵空气接口	G 1/8
阀体	Aluminium alloy

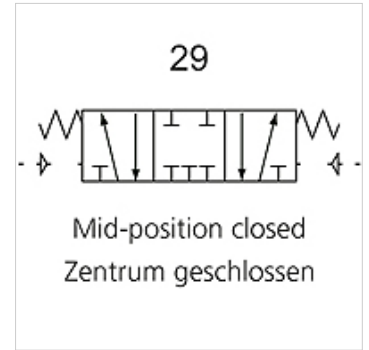

## 提示

其它数据应客户要求提供。

## 货品

名称	接口	排气接口	流量 (L/min)	电路图编号	结构尺寸
K- 07 15 04 21	M 5	M 5	250	29	100
K- 07 15 04 22	G 1/8	G 1/8	400	29	100
K- 07 15 04 23	G 1/8	G 1/8	550	29	200
K- 07 15 04 24	G 1/4	G 1/8	550	29	200
K- 07 15 04 25	G 1/4	G 1/4	950	29	300
K- 07 15 04 26	G 3/8	G 1/4	950	29	300
K- 07 15 04 27	G 1/2"	G 1/2	1600	29	400