


K-DRV 2

Unidirectional flow control valves

属性

工作压力	最大 10 巴
工作温度	0 °C to +150 °C
密封材料	FKM
壳体	Stainless steel 1.4404
内部部件	Stainless steel 1.4404

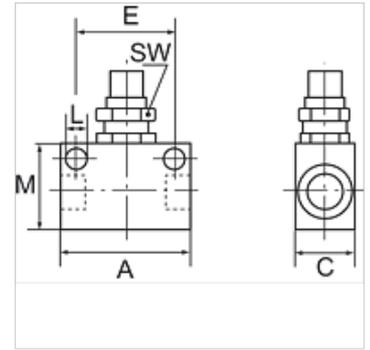

提示

其它数据应客户要求提供。

描述

Unidirectional flow control valve, restricted in the flow direction and free passage in the opposite direction.

货品

名称	螺纹	A (mm)	C (mm)	E (mm)	L (mm)	M (mm)	SW (mm)
K- 07 30 12 41	G 1/8	34,0	15,0	24,0	4,5	20,0	14
K- 07 30 12 42	G 1/4	50,0	25,0	35,0	5,5	30,0	22