


K-L-STECK STECKNIPPEL VB MINI

Union elbows with push-in plug, mini

HANSA FLEX

属性

工作压力	Max. 10 bar, vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	压缩空气
温度范围	0 °C to +60 °C
原料	Plastic, Nickel plated brass
紧压环	Plastic

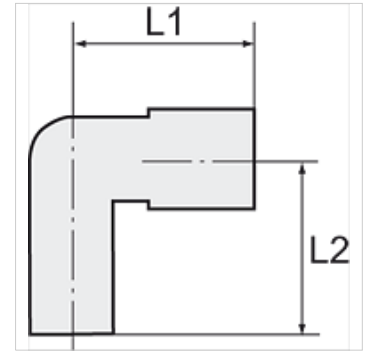

提示

其它数据应客户要求提供。

描述

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

货品

名称	用于软管外径-Ø	L1 (mm)	L2 (mm)	插式内接头 (mm)
K- 07 40 50 07	3 mm	11,5	26,6	3
K- 07 40 50 08	4 mm	14,0	28,5	4
K- 07 40 50 09	6 mm	16,3	32,0	6