



K-BKR SCHW STAHLHEBEL IG IG

Ball valves with black steel lever, lightweight type, female/female thread

HANSA FLEX

属性

| | |
|------|--|
| 应用范围 | Compressed air, water, non-toxic and non-corrosive gases, heating systems, agriculture |
| 工作压力 | Max. 40 bar |
| 工作温度 | -15 °C to +90 °C |
| 螺纹描述 | G thread acc. DIN EN ISO 228-1 |
| 壳体 | Nickel-plated brass |
| 柄 | Steel, with plastic coating |
| 球体 | Chrome-plated brass |
| 球密封 | PTFE |
| 主轴密封 | HNBR / EPDM / PTFE. 2 O-Rings (HNBR / EPDM) 1 gasket (PTFE) additional PTFE-gasket |

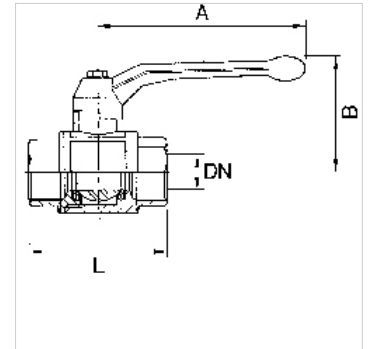

提示

其它数据应客户要求提供。

货品

| 名称 | DN | 螺纹 | A (mm) | B (mm) | L (mm) |
|----------------|----|---------|-----------|-----------|-----------|
| K- 07 30 00 83 | 8 | G 1/4 | 85,0 | 42,0 | 39,0 |
| K- 07 30 00 87 | 10 | G 3/8 | 85,0 | 42,0 | 43,0 |
| K- 07 30 00 91 | 15 | G 1/2 | 85,0 | 46,0 | 50,0 |
| K- 07 30 00 95 | 20 | G 3/4 | 105,0 | 53,0 | 58,0 |
| K- 07 30 00 99 | 25 | G 1 | 105,0 | 57,0 | 69,0 |
| K- 07 30 01 03 | 32 | G 1 1/4 | 130,0 | 70,0 | 81,0 |
| K- 07 30 01 07 | 40 | G 1 1/2 | 130,0 | 76,0 | 93,0 |
| K- 07 30 01 11 | 50 | G 2 | 165,0 | 92,0 | 110,0 |