


K-PRAEZIONS STEUERREGLER

Precision pilot regulators (feedback)

HANSA FLEX

属性

| | |
|--------|-----------------------|
| 入口压力 | Max. 16 bar |
| 介质温度 | max. 80 °C |
| 环境温度 | Max. 80 °C |
| 压力计接口 | For feedback pressure |
| 密封材料 | FKM |
| 壳体 | Die-cast zinc |
| 膜片 | FKM |
| 自身空气消耗 | 3 to 6 l/min |

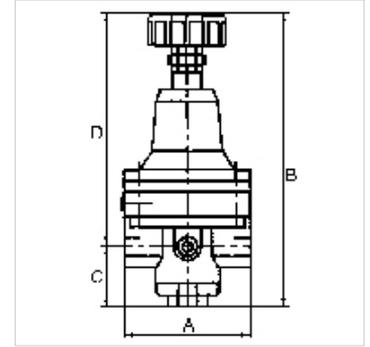

提示

其它数据应客户要求提供。

描述

Diaphragm pressure regulator for feedback systems, specially designed for use in a pneumatically controlled closed control loop in combination with a pressure regulator with pneumatic remote control, e.g. our Art. Nos. K-07250505 to K-07250510.

货品

| 名称 | 螺纹 | 调节范围 | A (mm) | B | C (mm) | D (mm) |
|----------------|-------|-------------|-----------|----------|-----------|-----------|
| K- 07 25 05 11 | G 1/4 | 0.2 - 7 bar | 82,0 | 142,8 mm | 19,4 | 123,4 |

附件

| | |
|--------------------------|--------|
| K-HALTERBAUSATZ STANDARD | Holder |
|--------------------------|--------|