


# K-DICHTRING PVC

Captive seals, PVC, max. temperature 70 °C

**HANSA FLEX**

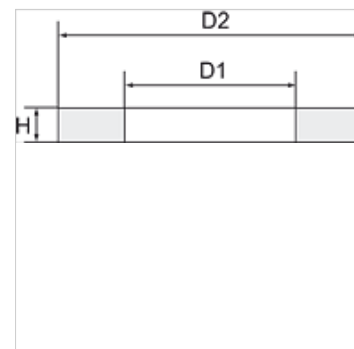

## 提示

其它数据应客户要求提供。

## 订购指南

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

## 货品

| 名称             | 用于螺纹  | D1<br>(mm) | D2<br>(mm) | H<br>(mm) |
|----------------|-------|------------|------------|-----------|
| K- 07 10 03 23 | M 5   | 5,0        | 8,0        | 1,2       |
| K- 07 10 03 27 | G 1/2 | 21,0       | 25,4       | 2,0       |
| K- 07 10 03 25 | G 1/4 | 13,1       | 17,9       | 1,8       |
| K- 07 10 03 26 | G 3/8 | 16,8       | 21,4       | 1,8       |
| K- 07 10 03 29 | G 1   | 33,4       | 40,0       | 2,0       |
| K- 07 10 03 28 | G 3/4 | 26,6       | 32,0       | 2,0       |
| K- 07 10 03 24 | G 1/8 | 9,9        | 13,9       | 1,8       |