


K-KOMP ZYL DOPPELW AG

Compact cylinders, double-acting (with magnet), non-cushioned, male piston rod

HANSA FLEX

属性

适用介质	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
工作压力	Max. 10 bar
起动压力	0,6 bar (Ø 20 bis Ø 32), 0,4 bar (Ø 40 bis Ø 100)
温度范围	-10 °C to +60 °C (Ø 20 to Ø 63) -10 °C to +80 °C (Ø 80 bis Ø 100)
活塞杆	C45 steel, hard chrome-plated
管	Anodised aluminium jacket with T-slots
活塞	POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 100)
密封材料	NBR

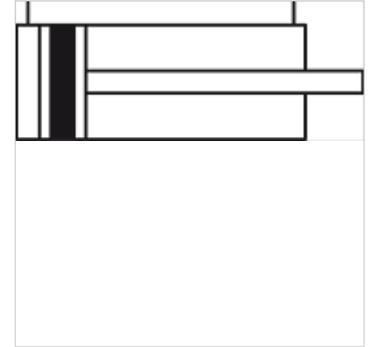

提示

其它数据应客户要求提供。

描述

New series acc. to ISO 21287 characterised by a very short and compact design. The standard type features a magnetic piston. Piston rod optionally with male or female thread.

货品

名称	活塞直径 Ø	行程 (mm)	接口	活塞杆外螺纹
K- 07 15 08 09	20 mm	5	M 5	M 8
K- 07 15 08 10	20 mm	10	M 5	M 8
K- 07 15 08 11	20 mm	15	M 5	M 8
K- 07 15 08 12	20 mm	20	M 5	M 8
K- 07 15 08 13	20 mm	25	M 5	M 8
K- 07 15 08 14	20 mm	30	M 5	M 8
K- 07 15 08 15	20 mm	40	M 5	M 8
K- 07 15 08 16	20 mm	50	M 5	M 8
K- 07 15 08 17	20 mm	60	M 5	M 8
K- 07 15 08 18	25 mm	5	M 5	M 8
K- 07 15 08 19	25 mm	10	M 5	M 8
K- 07 15 08 20	25 mm	15	M 5	M 8
K- 07 15 08 21	25 mm	20	M 5	M 8
K- 07 15 08 22	25 mm	25	M 5	M 8
K- 07 15 08 23	25 mm	30	M 5	M 8
K- 07 15 08 24	25 mm	40	M 5	M 8
K- 07 15 08 25	25 mm	50	M 5	M 8
K- 07 15 08 26	25 mm	60	M 5	M 8
K- 07 15 08 27	32 mm	5	G 1/8	M 10 x 1.25
K- 07 15 08 28	32 mm	10	G 1/8	M 10 x 1.25
K- 07 15 08 29	32 mm	15	G 1/8	M 10 x 1.25
K- 07 15 08 30	32 mm	20	G 1/8	M 10 x 1.25
K- 07 15 08 31	32 mm	25	G 1/8	M 10 x 1.25
K- 07 15 08 32	32 mm	30	G 1/8	M 10 x 1.25
K- 07 15 08 33	32 mm	40	G 1/8	M 10 x 1.25
K- 07 15 08 34	32 mm	50	G 1/8	M 10 x 1.25
K- 07 15 08 35	32 mm	60	G 1/8	M 10 x 1.25
K- 07 15 08 36	32 mm	80	G 1/8	M 10 x 1.25
K- 07 15 08 37	40 mm	5	G 1/8	M 10 x 1.25
K- 07 15 08 38	40 mm	10	G 1/8	M 10 x 1.25
K- 07 15 08 39	40 mm	15	G 1/8	M 10 x 1.25
K- 07 15 08 40	40 mm	20	G 1/8	M 10 x 1.25
K- 07 15 08 41	40 mm	25	G 1/8	M 10 x 1.25
K- 07 15 08 42	40 mm	30	G 1/8	M 10 x 1.25
K- 07 15 08 43	40 mm	40	G 1/8	M 10 x 1.25
K- 07 15 08 44	40 mm	50	G 1/8	M 10 x 1.25
K- 07 15 08 45	40 mm	60	G 1/8	M 10 x 1.25
K- 07 15 08 46	40 mm	80	G 1/8	M 10 x 1.25
K- 07 15 08 47	50 mm	5	G 1/8	M 12 x 1.25



尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。

05.05.2026

HANSA-FLEX AG

www.hansa-flex.com

1

K-KOMP ZYL DOPPELW AG

Compact cylinders, double-acting (with magnet), non-cushioned,
male piston rod

HANSA FLEX

货品

名称	活塞直径 Ø	行程 (mm)	接口	活塞杆外螺纹
K-07 15 08 48	50 mm	10	G 1/8	M 12 x 1.25
K-07 15 08 49	50 mm	15	G 1/8	M 12 x 1.25
K-07 15 08 50	50 mm	20	G 1/8	M 12 x 1.25
K-07 15 08 51	50 mm	25	G 1/8	M 12 x 1.25
K-07 15 08 52	50 mm	30	G 1/8	M 12 x 1.25
K-07 15 08 53	50 mm	40	G 1/8	M 12 x 1.25
K-07 15 08 54	50 mm	50	G 1/8	M 12 x 1.25
K-07 15 08 55	50 mm	60	G 1/8	M 12 x 1.25
K-07 15 08 56	50 mm	80	G 1/8	M 12 x 1.25
K-07 15 08 57	63 mm	5	G 1/8	M 12 x 1.25
K-07 15 08 58	63 mm	10	G 1/8	M 12 x 1.25
K-07 15 08 59	63 mm	15	G 1/8	M 12 x 1.25
K-07 15 08 60	63 mm	20	G 1/8	M 12 x 1.25
K-07 15 08 61	63 mm	25	G 1/8	M 12 x 1.25
K-07 15 08 62	63 mm	30	G 1/8	M 12 x 1.25
K-07 15 08 63	63 mm	40	G 1/8	M 12 x 1.25
K-07 15 08 64	63 mm	50	G 1/8	M 12 x 1.25
K-07 15 08 65	63 mm	60	G 1/8	M 12 x 1.25
K-07 15 08 66	63 mm	80	G 1/8	M 12 x 1.25
K-07 15 08 67	80 mm	5	G 1/8	M 16 x 1.5
K-07 15 08 68	80 mm	10	G 1/8	M 16 x 1.5
K-07 15 08 69	80 mm	15	G 1/8	M 16 x 1.5
K-07 15 08 70	80 mm	20	G 1/8	M 16 x 1.5
K-07 15 08 71	80 mm	25	G 1/8	M 16 x 1.5
K-07 15 08 72	80 mm	30	G 1/8	M 16 x 1.5
K-07 15 08 73	80 mm	40	G 1/8	M 16 x 1.5
K-07 15 08 74	80 mm	50	G 1/8	M 16 x 1.5
K-07 15 08 75	80 mm	60	G 1/8	M 16 x 1.5
K-07 15 08 76	80 mm	80	G 1/8	M 16 x 1.5
K-07 15 07 99	100 mm	5	G 1/8	M 16 x 1.5
K-07 15 08 00	100 mm	10	G 1/8	M 16 x 1.5
K-07 15 08 01	100 mm	15	G 1/8	M 16 x 1.5
K-07 15 08 02	100 mm	20	G 1/8	M 16 x 1.5
K-07 15 08 03	100 mm	25	G 1/8	M 16 x 1.5
K-07 15 08 04	100 mm	30	G 1/8	M 16 x 1.5
K-07 15 08 05	100 mm	40	G 1/8	M 16 x 1.5
K-07 15 08 06	100 mm	50	G 1/8	M 16 x 1.5
K-07 15 08 07	100 mm	60	G 1/8	M 16 x 1.5
K-07 15 08 08	100 mm	80	G 1/8	M 16 x 1.5