
K-ELEKTRISCHE ANSCHLUESSE

Electrical connection (multi-pole, 25-pin, IP 65)

HANSA FLEX

属性

适用介质	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
工作压力	Max. vacuum 10 bar (external pilots), 3 to 7 bar (internal pilots as standard)
控制压力	3 - 7 bar
温度范围	-10 °C to +60 °C
流量	200 Nl/min (Ø 4), 500 Nl/min (Ø 6), 800 Nl/min (Ø 8)
触发次数	Max. 16 (e.g. 16 spring return valves)
手动辅助操纵件	Latching (bistable), Monostable (non-latching) version also available on request
功率消耗	0.6 W per pilot
保护等级	IP 65

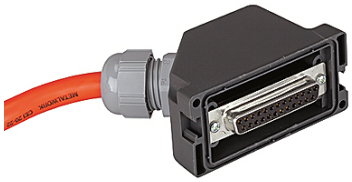

提示

其它数据应客户要求提供。

描述

These compact valve terminals, with a maximum flow rate of 800 Nl/min, can be individually adapted to the specific conditions of each application thanks tot he wide range of functions and various input and intermediate plates.Since each valve terminal is a customer-specific combination of a series of individual elements, the catalogue only lists the available input, intermediate and end plates as well as the different valve discs and the 25-pin multi-pole connectors.

附加信息

Important: The scope of supply does not include a connector. Please order separately.

货品

名称	定义
K- 07 15 22 45	IP 67 connector, 25-pin, with 1 m cable
K- 07 15 22 46	IP 67 connector, 25-pin, with 2.5 m cable
K- 07 15 22 47	IP 67 connector, 25-pin, with 5 m cable

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。