
K-SCHL-AUFROLLER LU WA S

Hose reels for compressed air and water, heavy-duty type

属性

软管材料	Polyurethane
工作压力	最大 10 巴
工作温度	-10 °C to +40 °C
固定	Wall, floor or ceiling
入口	Hose stem 8 mm



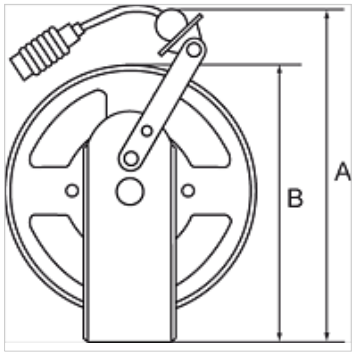

提示

其它数据应客户要求提供。

描述

Heavy-duty steel design for industrial applications. Blue, powder-coated housing. An automatic latching mechanism allows the hose to be engaged at any length. Enclosed spring. Precise locking device for continuous feeding or latching mechanism. Reel guide prevents excessive wear on the hose.

货品

名称	软管尺寸	A (mm)	B (mm)	软管长度 (m)
K- 07 10 06 24	10 mm x 6,5 mm	420,0	353,0	10
K- 07 10 06 25	10 mm x 6,5 mm	420,0	353,0	20
K- 07 10 06 26	12 mm x 8 mm	420,0	353,0	15
K- 07 10 06 27	16 mm x 11 mm	420,0	353,0	15

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。