K-RD DURCHGANGSFORM LEI VA


Check valve - straight-way type, lightweight series, stainless steel

HANSA FLEX

属性

工作压力	2 - 16 bar
工作温度	-20 °C to +150 °C
开口压力	min. 0.03 bar
密封材料	FKM
弹簧	Stainless steel 1.4301
壳体	Stainless steel 1.4301



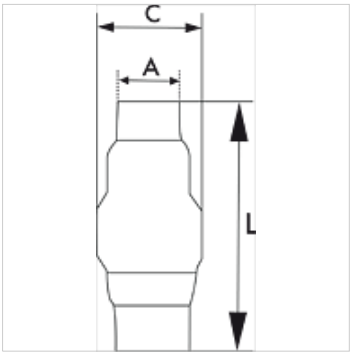

提示

其它数据应客户要求提供。

描述

Stainless steel check valve with full bore and very low opening pressure, no maintenance required. Applications: Compressed air, water, neutral gases, gaseous and liquid non-corrosive media, oils.

货品

名称	螺纹	A (mm)	C (mm)	L (mm)
K- 07 30 29 23	G 1/4	20,0	32,0	55,9
K- 07 30 29 28	G 3/8	20,0	32,0	56,0
K- 07 30 29 22	G 1/2	25,0	32,0	55,6
K- 07 30 29 27	G 3/4	29,0	44,0	66,7
K- 07 30 29 19	G 1	36,0	53,0	83,6
K- 07 30 29 21	G 1 1/4	45,0	62,0	96,0
K- 07 30 29 20	G 1 1/2	51,0	78,0	114,0
K- 07 30 29 24	G 2	64,0	89,0	120,5
K- 07 30 29 25	G 2 1/2	80,0	113,0	141,5
K- 07 30 29 26	G 3	94,0	132,0	160,0

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。