K-WTEH SERIE ONE M DRS


Service units, »ONE« Series, with pressure switch

HANSA FLEX

属性

入口压力	Max. 10 bar
温度范围	-10 °C to +50 °C
适用介质	压缩空气
保护等级	IP 65
工作压力	0.5 - 8 bar
压力开关	Changeover contact
过滤器元件中的气孔宽度	20 µm
流量值测量	At 6,3 bar and Δp = 1 bar



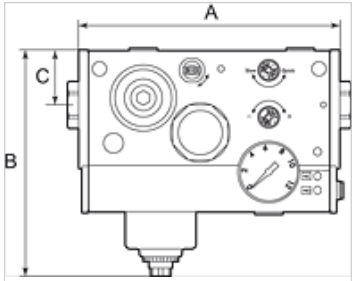

提示

其它数据应客户要求提供。

描述

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

订购指南

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

货品

名称	接口	流量 (L/min)	A (mm)	B	C (mm)	电压
K- 07 25 13 82	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 83	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 84	G 1/2	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。