


# K-STECKNIPPEL RED

push-in plugs, unequal

**HANSA FLEX**

## 属性

工作压力	Max. 15 bar, coarse vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	Compressed air and all gases or liquids that are compatible with the materials
温度范围	-20 °C to +80 °C
密封面	Parallel version: O-ring in housing, Conical version: thread coating
原料	Plastic, Nickel plated brass
紧压环	Plastic

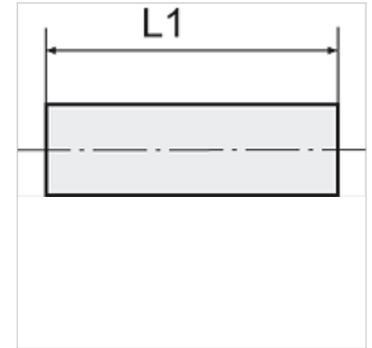

## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

名称	用于软管外径-Ø	L1 (mm)
K- 07 40 42 83	6 mm / 4 mm	37,5
K- 07 40 42 84	8 mm / 4 mm	40,5
K- 07 40 42 85	8 mm / 6 mm	42,5
K- 07 40 42 86	10 mm / 6 mm	44,5
K- 07 40 42 87	10 mm / 8 mm	47,0
K- 07 40 42 88	12 mm / 8 mm	49,5
K- 07 40 42 89	12 mm / 10 mm	51,0