


K-RUNDZYLINDER DOPP O E D

Round cylinders, double acting, magnetic, non-cushioned

HANSA FLEX

属性

| | |
|------------|---|
| 适用介质 | Filtered (50 µm), unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| 工作压力 | Max. 10 bar |
| 起动力 | 0,6 bar |
| 温度范围 | -10 °C to +60 °C |
| 结构 | Connection: Aluminium pipe / end caps flanged |
| 活塞杆 | Stainless steel 1.4301 (Ø 16), C45 steel, hard chrome-plated (Ø 20 and Ø 25) |
| 管 | Aluminium alloy, anodised |
| 外盖,底板,导向衬套 | Technopolymer |
| 活塞杆密封件 | PU |
| 活塞密封件 | PU |

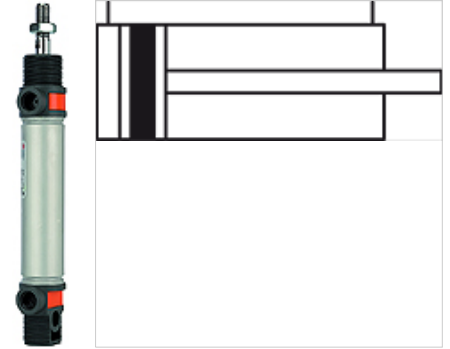

提示

Maximum recommended stroke: Ø 16 = stroke 200, Ø 20 and Ø 25 = stroke 500. Longer strokes can result in malfunctions.
其它数据应客户要求提供。

描述

Economy standard version with aluminum pipe and magnet piston.

附加信息

Important: The scope of supply does not include a connector. Please order separately.

货品

| 名称 | 活塞直径 Ø | 行程 (mm) | 接口 | 活塞杆外螺纹 |
|----------------|--------|---------|-------|-------------|
| K- 07 15 17 62 | 16 mm | 10 | M 5 | M 6 |
| K- 07 15 17 63 | 16 mm | 25 | M 5 | M 6 |
| K- 07 15 17 64 | 16 mm | 50 | M 5 | M 6 |
| K- 07 15 17 65 | 16 mm | 80 | M 5 | M 6 |
| K- 07 15 17 66 | 16 mm | 100 | M 5 | M 6 |
| K- 07 15 17 67 | 16 mm | 125 | M 5 | M 6 |
| K- 07 15 17 68 | 16 mm | 160 | M 5 | M 6 |
| K- 07 15 17 69 | 16 mm | 200 | M 5 | M 6 |
| K- 07 15 17 70 | 20 mm | 10 | G 1/8 | M 8 |
| K- 07 15 17 71 | 20 mm | 25 | G 1/8 | M 8 |
| K- 07 15 17 72 | 20 mm | 50 | G 1/8 | M 8 |
| K- 07 15 17 73 | 20 mm | 80 | G 1/8 | M 8 |
| K- 07 15 17 74 | 20 mm | 100 | G 1/8 | M 8 |
| K- 07 15 17 75 | 20 mm | 125 | G 1/8 | M 8 |
| K- 07 15 17 76 | 20 mm | 160 | G 1/8 | M 8 |
| K- 07 15 17 77 | 20 mm | 200 | G 1/8 | M 8 |
| K- 07 15 17 78 | 20 mm | 250 | G 1/8 | M 8 |
| K- 07 15 17 79 | 20 mm | 500 | G 1/8 | M 8 |
| K- 07 15 17 80 | 25 mm | 10 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 81 | 25 mm | 25 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 82 | 25 mm | 50 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 83 | 25 mm | 80 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 84 | 25 mm | 100 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 85 | 25 mm | 125 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 86 | 25 mm | 160 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 87 | 25 mm | 200 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 88 | 25 mm | 250 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 89 | 25 mm | 500 | G 1/8 | M 10 x 1.25 |

附件

| | |
|-----------------------------|------------------------|
| K-FUSSBEFESTIGUNG 5 | Foot model |
| K-FLANSCHBEFESTIGUNGEN1 | Flange model |
| K-KOPFMUTTER DECKEL BODEN 2 | Hexagon nut (for head) |



尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。

05.06.2026

HANSA-FLEX AG

www.hansa-flex.com

1

K-RUNDZYLINDER DOPP O E D

Round cylinders, double acting, magnetic, non-cushioned

