

K-VSTO POM
Plugs

属性

工作压力	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
工作温度	-20 °C to +70 °C in air; +1 °C to +70 °C in water
原料	Acetalpolymerisat (POM)
密封材料	NBR



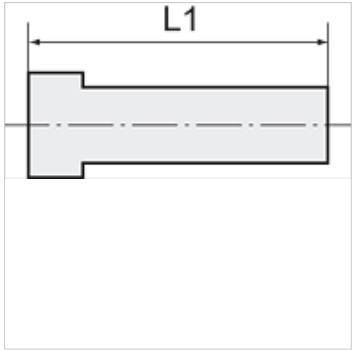

提示

其它数据应客户要求提供。

描述

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

货品

名称	颜色	L1 (mm)	接套 (mm)
K- 07 40 29 11	红色	28,0	4
K- 07 40 29 12	红色	28,0	5
K- 07 40 29 13	红色	30,0	6
K- 07 40 29 14	红色	31,0	8
K- 07 40 29 15	红色	36,5	10
K- 07 40 29 16	红色	38,5	12
K- 07 40 29 17	黑色	45,0	15
K- 07 40 29 18	黑色	41,5	18
K- 07 40 29 19	黑色	45,0	22
K- 07 40 29 20	黑色	56,0	28

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。