


# K-STECKVERBINDU ST RED 1

Reducers with push-in plug

**HANSA FLEX**

## 属性

|      |                     |
|------|---------------------|
| 工作压力 | Max. 16 bar         |
| 工作温度 | -20 °C to +150 °C   |
| 原料   | 黄铜镀镍                |
| 紧压环  | Nickel-plated brass |
| 张紧环  | Stainless steel     |

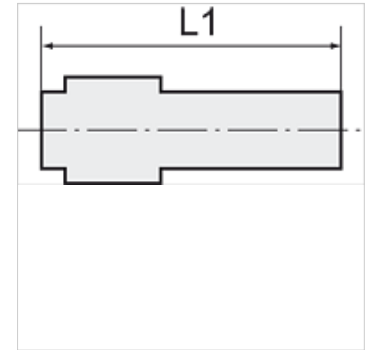

## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## 货品

| 名称             | 用于软管外径-Ø | L1<br>(mm) | 插式内接头<br>(mm) |
|----------------|----------|------------|---------------|
| K- 07 40 47 95 | 4 mm     | 29,5       | 6             |
| K- 07 40 47 96 | 6 mm     | 32,5       | 8             |
| K- 07 40 47 97 | 8 mm     | 38,5       | 10            |
| K- 07 40 47 98 | 10 mm    | 41,0       | 12            |