
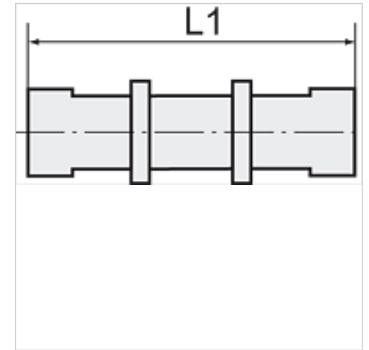


K-SCHOTT-STECKVERB ABSP

Female bulkhead stop unions (pressure max. 10 bar)

属性

工作压力	Max. 10 bar, vacuum
应用范围	Air, vacuum
推荐的软管	PU or PA (nylon)
适用介质	压缩空气
标准	M thread acc. to DIN 13-1, with O-Ring
温度范围	0 °C to +60 °C
原料	Plastic, Nickel plated brass
紧压环	Plastic



提示

其它数据应客户要求提供。

描述

The air supply is completely shut off as soon as the hose is disconnected from the union.
The flow rate is only guaranteed if the hose is securely inserted.

货品

名称	螺纹	用于软管外径-Ø	L1 (mm)	SW
K- 07 40 43 74	M 12 x 1.5	4 mm	41,0	14 mm
K- 07 40 43 75	M 14 x 1.5	6 mm	44,5	17 mm
K- 07 40 43 76	M 16 x 1.5	8 mm	50,3	19 mm
K- 07 40 43 77	M 20 x 1.5	10 mm	58,5	24 mm
K- 07 40 43 78	M 24 x 1.5	12 mm	62,2	27 mm