


# K-WTEH 2-TLG PC SCHU VARIOBLOC

Service units, 2-piece with polycarbonate bowl and bowl guard

**HANSA FLEX**

## 属性

|             |   |
|-------------|---|
| 入口压力        | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)      |
| 介质温度        | max. 50 °C  |
| 环境温度        | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl)        |
| 过滤器元件中的气孔宽度 | 40 µm   |
| 密封材料        | NBR   |
| 弹簧罩         | POM   |
| 壳体          | Die-cast zinc   |
| 膜片          | NBR   |
| 泄水头         | PA  |
| Drain valve | Manual  |
| 流量值测量       | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

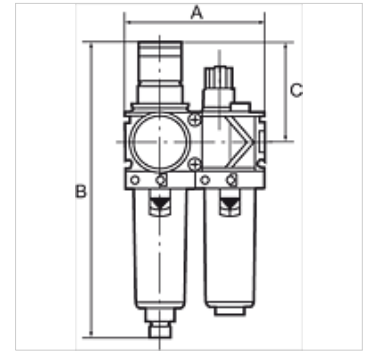

## 提示

其它数据应客户要求提供。

## 描述

Two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

## 订购指南

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges (0.5 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

## 附加信息

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges.

## 货品

| 名称             | 螺纹    | 调节范围         | 流量 (L/min) | A (mm) | B        | C (mm) |
|----------------|-------|--------------|------------|--------|----------|--------|
| K- 07 25 22 81 | G 1/4 | 0.5 - 10 bar | 1500       | 96,0   | 203,0 mm | 68,0   |
| K- 07 25 22 80 | G 3/8 | 0.5 - 10 bar | 1800       | 96,0   | 203,0 mm | 68,0   |
| K- 07 25 22 79 | G 1/2 | 0.5 - 10 bar | 3400       | 140,0  | 273,0 mm | 98,0   |
| K- 07 25 22 78 | G 3/4 | 0.5 - 10 bar | 5000       | 140,0  | 273,0 mm | 98,0   |
| K- 07 25 22 77 | G 1   | 0.5 - 10 bar | 5000       | 194,0  | 273,0 mm | 98,0   |