



K-ODER-VENTIL

OR valves

HANSA FLEX

属性

工作压力	2 - 10 bar
温度范围	-10 °C to +80 °C
在 6.3 巴和 Δ 1 巴条件下的流量	500 NI/min (G 1/8), 1300 NI/min (G 1/4)
阀体	铝
球体	Stainless steel
密封	NBR

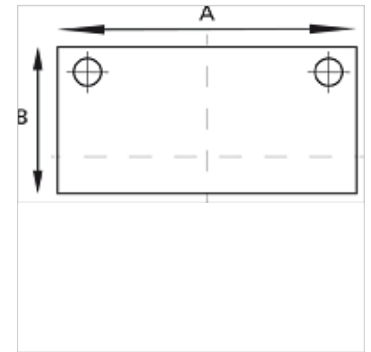

提示

其它数据应客户要求提供。

描述

The valve has two inlets and one outlet. A signal appears at the outlet when the left or right inlet is pressurised.
If the pressure at the two inlets is different, the stronger of the two signals appears at the outlet.

货品

名称	螺纹	A (mm)	B (mm)
K- 07 15 26 05	3 x G 1/8	36,0	20,0
K- 07 15 26 04	3 x G 1/4	43,0	25,0