



# K-ODER-VENTIL

OR valves

**HANSA FLEX**

## 属性

工作压力	2 - 10 bar
温度范围	-10 °C to +80 °C
在 6.3 巴和 $\Delta$ 1 巴条件下的流量	500 NI/min (G 1/8), 1300 NI/min (G 1/4)
阀体	铝
球体	Stainless steel
密封	NBR

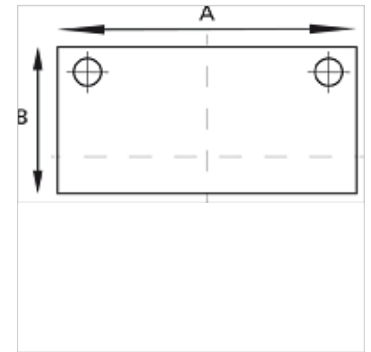

## 提示

其它数据应客户要求提供。

## 描述

The valve has two inlets and one outlet. A signal appears at the outlet when the left or right inlet is pressurised. <br>If the pressure at the two inlets is different, the stronger of the two signals appears at the outlet.

## 货品

名称	螺纹	A (mm)	B (mm)
K- 07 15 26 05	3 x G 1/8	36,0	20,0
K- 07 15 26 04	3 x G 1/4	43,0	25,0