

K-ODER-VENTIL
OR valves

HANSA-FLEX

属性

工作压力	2 - 10 bar
温度范围	-10 °C to +80 °C
在 6.3 巴和 Δ 1 巴条件下的流量	500 Nl/min (G 1/8), 1300 Nl/min (G 1/4)
阀体	铝
球体	Stainless steel
密封	NBR



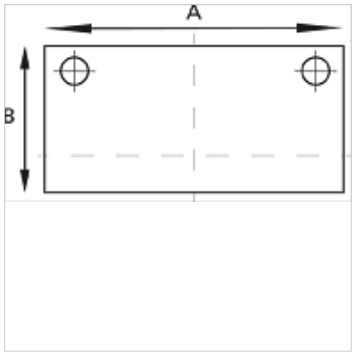

提示

其它数据应客户要求提供。

描述

The valve has two inlets and one outlet. A signal appears at the outlet when the left or right inlet is pressurised.
If the pressure at the two inlets is different, the stronger of the two signals appears at the outlet.

货品

名称	螺纹	A (mm)	B (mm)
K- 07 15 26 05	3 x G 1/8	36,0	20,0
K- 07 15 26 04	3 x G 1/4	43,0	25,0

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。