


# K-STECKVERSCHR AGR-K SK

Male connectors, conical male thread with outer hex

**HANSA****FLEX**

## 属性

|      |                  |
|------|------------------|
| 工作压力 | Max. 16 bar      |
| 工作温度 | -20 °C to +80 °C |
| 原料   | 黄铜镀镍             |
| 紧压环  | Hostaform        |
| 张紧环  | Stainless steel  |

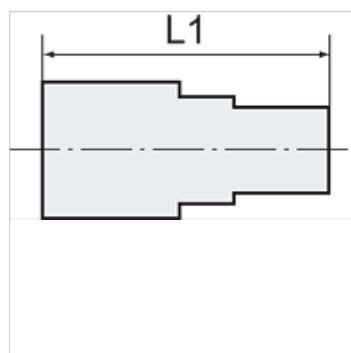

## 提示

其它数据应客户要求提供。

## 描述

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## 货品

| 名称            | 螺纹    | 用于软管外径-Ø | 内六角<br>(mm) | L1<br>(mm) | SW    |
|---------------|-------|----------|-------------|------------|-------|
| K-07 40 24 76 | R 1/8 | 4 mm     | 3,0         | 18,5       | 10 mm |
| K-07 40 24 77 | R 1/8 | 6 mm     | 4,0         | 22,5       | 12 mm |
| K-07 40 24 78 | R 1/8 | 8 mm     | 5,0         | 26,0       | 13 mm |
| K-07 40 24 74 | R 1/4 | 6 mm     | 4,0         | 22,3       | 12 mm |
| K-07 40 24 75 | R 1/4 | 8 mm     | 6,0         | 25,5       | 14 mm |
| K-07 40 24 73 | R 1/4 | 10 mm    | 7,0         | 28,9       | 16 mm |
| K-07 40 24 81 | R 3/8 | 8 mm     | 6,0         | 24,9       | 14 mm |
| K-07 40 24 79 | R 3/8 | 10 mm    | 7,0         | 28,9       | 16 mm |
| K-07 40 24 80 | R 3/8 | 12 mm    | 10,0        | 27,0       | 19 mm |
| K-07 40 24 72 | R 1/2 | 12 mm    | 10,0        | 26,6       | 19 mm |