


K-STECKVERBINDU RED

Reducers



| 属性 | |
|------|---------------------|
| 工作压力 | Max. 16 bar |
| 工作温度 | -20 °C to +150 °C |
| 原料 | 黄铜镀镍 |
| 紧压环 | Nickel-plated brass |
| 张紧环 | Stainless steel |

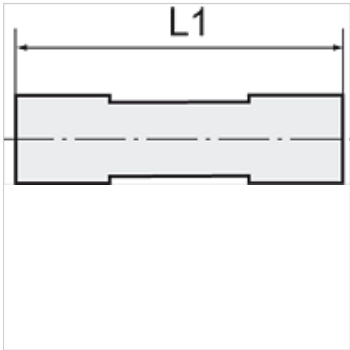

提示

其它数据应客户要求提供。

描述

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

货品

| 名称 | 用于软管外径-Ø | L1 (mm) |
|----------------|---------------|------------|
| K- 07 40 47 75 | 6 mm / 4 mm | 33,0 |
| K- 07 40 47 76 | 8 mm / 6 mm | 39,0 |
| K- 07 40 47 77 | 10 mm / 8 mm | 39,5 |
| K- 07 40 47 78 | 12 mm / 10 mm | 41,5 |