
K-STECKVERBINDU RED


Reducers

HANSA-FLEX

属性

工作压力	Max. 16 bar
工作温度	-20 °C to +150 °C
原料	黄铜镀镍
紧压环	Nickel-plated brass
张紧环	Stainless steel



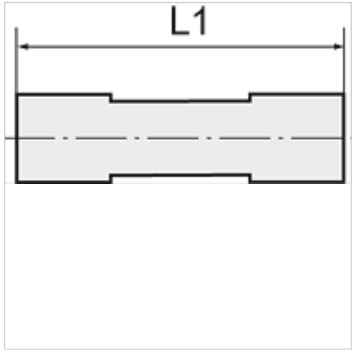

提示

其它数据应客户要求提供。

描述

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

货品

名称	用于软管外径-Ø	L1 (mm)
K- 07 40 47 75	6 mm / 4 mm	33,0
K- 07 40 47 76	8 mm / 6 mm	39,0
K- 07 40 47 77	10 mm / 8 mm	39,5
K- 07 40 47 78	12 mm / 10 mm	41,5

尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。