

# K-SCHOTT-STECKVERB 3

Female bulkhead connectors

## 属性

| | |
|---|---|
| **工作压力** | Max. 15 bar, coarse vacuum |
| **应用范围** | Air, vacuum |
| **推荐的软管** | PU or PA (nylon) |
| **适用介质** | Compressed air and all gases or liquids that are compatible with the materials |
| **温度范围** | -20 °C to +80 °C |
| **原料** | Plastic, Nickel plated brass |
| **紧压环** | Plastic |



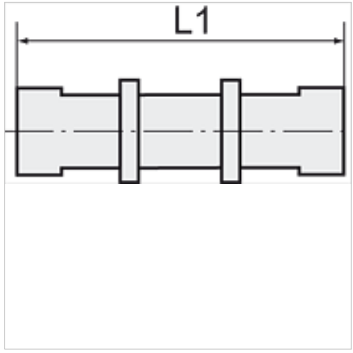


## 提示

其它数据应客户要求提供。

## 描述

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## 货品

| 名称 | 用于软管外径-Ø | 配电板螺纹 | L1 (mm) | SW |
|---|---|---|---|---|
| **K- 07 40 04 31** | 4 mm | M 12 x 1 | 31,1 | 14 mm |
| **K- 07 40 04 32** | 6 mm | M 14 x 1 | 33,4 | 17 mm |
| **K- 07 40 04 33** | 8 mm | M 16 x 1 | 37,7 | 19 mm |
| **K- 07 40 04 34** | 10 mm | M 20 x 1 | 41,8 | 24 mm |
| **K- 07 40 04 35** | 12 mm | M 22 x 1 | 46,7 | 27 mm |
| **K- 07 40 04 36** | 16 mm | M 27 x 1 | 51,2 | 32 mm |

*尽管经过了仔细审阅,但我们无法完全排除发生错误的可能,对所提供的信息数据本公司不承担任何责任。*