


属性

| | |
|------|------------------|
| 工作压力 | Max. 16 bar |
| 工作温度 | -20 °C to +80 °C |
| 原料 | 黄铜镀镍 |
| 紧压环 | Hostaform |
| 张紧环 | Stainless steel |

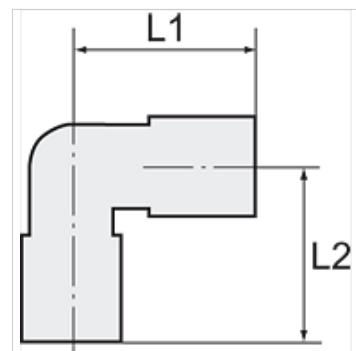

提示

其它数据应客户要求提供。

描述

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

货品

| 名称 | 螺纹 | 用于软管外径-Ø | L1 (mm) | L2 (mm) | SW |
|---------------|-------|----------|------------|------------|-------|
| K-07 40 25 65 | R 1/8 | 4 mm | 18,6 | 16,0 | 10 mm |
| K-07 40 25 66 | R 1/8 | 6 mm | 21,9 | 16,0 | 10 mm |
| K-07 40 25 67 | R 1/8 | 8 mm | 25,4 | 16,0 | 10 mm |
| K-07 40 25 63 | R 1/4 | 6 mm | 21,9 | 18,5 | 10 mm |
| K-07 40 25 64 | R 1/4 | 8 mm | 25,4 | 18,5 | 10 mm |
| K-07 40 25 62 | R 1/4 | 10 mm | 27,2 | 22,0 | 14 mm |